


Capacitor, Film, Metallized Polypropylene, 0.1 uF, +/-10% Tol, -40/+110C, Safety: X1, 440 VAC, Lead Spacing=22.5 mm

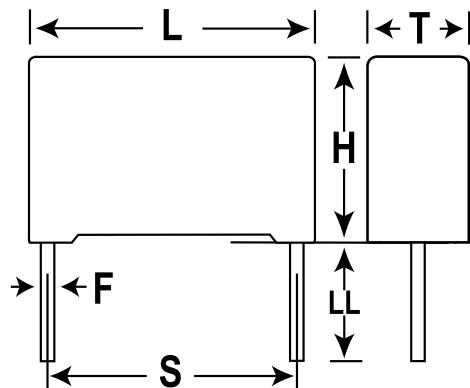

General Information

| | |
|------------------|--------------------------|
| Supplier: | KEMET |
| Dielectric: | Metallized Polypropylene |
| Application: | Safety: X1 |
| Sub Application: | AEC-Q200 |
| Style: | Radial Box |
| Lead Form: | Wire Leads |
| Features: | Pulse |
| Approvals: | AEC-Q200, ENEC, UL, cUL |
| RoHS: | Yes |

Dimensions (mm)

| Symbol | Dimension | Tolerance |
|--------|-----------|-----------|
| L | 26.5 | +0.3 |
| H | 16 | +0.1 |
| T | 7 | +0.2 |
| S | 22.5 | +/-0.4 |
| LL | 25 | +2/-1 |
| F | 0.8 | +/-0.05 |

Specifications

| | |
|-----------------------------|-----------|
| Capacitance: | 0.1 uF |
| Voltage: | 1000 VDC |
| Tolerance: | +/-10% |
| Voltage AC: | 440 VAC |
| Rated Temperature: | 110C |
| Temperature Range: | -40/+110C |
| Dissipation Factor @ 1 kHz: | 0.1% |
| Insulation Resistance: | 100 GOhm |
| Maximum dVdT: | 300 v/us |

Packaging Specifications

| | |
|-------------------|------|
| Package Kind: | Bulk |
| Package Quantity: | 500 |