


**KEMET Part Number: PME261KE6470KR30**  
(P561EH474K220A)

PME261/P561, Film, Metallized Paper, General Purpose, 0.47 uF, 10%, 400 VDC, 85C, Lead Spacing = 25.4mm

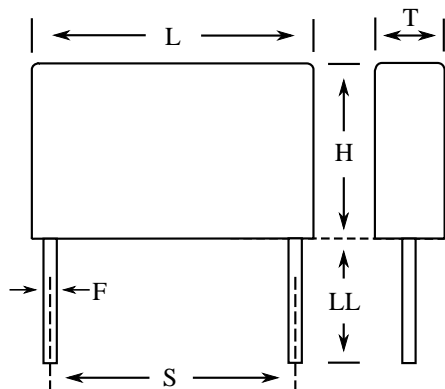

**General Information**

Supplier:	KEMET
Series:	PME261/P561
Dielectric:	Metallized Paper
Style:	Radial
Features:	Pulse in DC and low frequency applications
RoHS:	Yes
Lead:	Wire Leads
Construction:	Molded
Miscellaneous:	AC Operation: 70C MAX

**Dimensions**

L	30.5mm MAX
H	17.3mm MAX
T	10.6mm MAX
S	25.4mm +/-0.4mm
LL	30mm +5mm
F	1mm +/-0.05mm

**Packaging Specifications**

Packaging:	Bulk, Bag
Packaging Quantity:	100

**Specifications**

Capacitance:	0.47 uF
Capacitance Tolerance:	10%
Voltage AC:	220 VAC
Voltage DC:	400 VDC
Temperature Range:	-40/+100C
Rated Temperature:	85C
Dissipation Factor:	1.3% 1kHz
Insulation Resistance:	8.511 GOhms
Max dV/dt:	370 V/us