


Film, Metallized Polypropylene, AC Filter, C44H, 150 uF, 5%, 1,000 V, 440 V

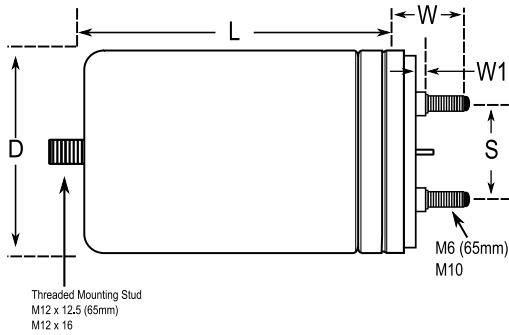

Dimensions

D	75mm +/-0.5mm
L	194mm +/-2mm
S	35mm +/-1mm

Packaging Specifications

Mounting:	Bolt - M12x16
Packaging:	Bulk
Packaging Quantity:	9

General Information

Dielectric:	Metallized Polypropylene
Style:	Can
Series:	C44H
Features:	Single Phase PFC
RoHS:	Yes
Lead:	Fast On (2+2)
Miscellaneous:	Thermal Resistance = 3.8 C/W. Surge Voltage = 1500 VDC

Specifications

Capacitance:	150 uF
Capacitance Tolerance:	5%
Voltage DC:	1000 VDC
Voltage AC:	440 VAC
Temperature Range:	-25/+70C
Rated Temperature:	70C
Max dVdt:	20 V
Resistance:	1.8 mOhms
Current:	45 Amps (RMS)
Inductance:	160 nH