

Three Phase Bridge + Thyristor

V_{RRM} / V_{DRM} 800 to 1800V
I_{FAV} / I_{TAV} 150A

Features

- Blocking voltage: 800 to 1800V
- Three Phase Bridge and a Thyristor
- Low Forward Voltage

Applications

- Inverter for AC or DC motor control
- Current stabilized power supply
- Switching power supply
- UL recognized applied for file no. E360040

Module Type

TYPE	V _{RRM} / V _{DRM}	V _{RSM}
MT150DT08L2	800V	900V
MT150DT12L2	1200V	1300V
MT150DT16L2	1600V	1700V
MT150DT18L2	1800V	1900V

◆Diode

Maximum Ratings

Symbol	Item	Conditions	Values	Units
I _D	Output Current(D.C.)	T _c =93°C Three phase full wave	150	A
I _{FSM}	Surge forward current	t=10mS T _{vj} =45°C	1500	A
i ² t	Circuit Fusing Consideration		11250	A ² s
V _{Isol}	Isolation Breakdown Voltage(R.M.S)	a.c.50HZ;r.m.s.;1min	3000	V
T _{vj}	Operating Junction Temperature		-40 to +150	°C
T _{stg}	Storage Temperature		-40 to +125	°C
M _t	Mounting Torque	To terminals(M4)	2±15%	Nm
M _t		To terminals(M6)	5±15%	Nm
M _s		To heatsink(M6)	5±15%	Nm
Weight		Module (Approximately)	320	g

Thermal Characteristics

Symbol	Item	Conditions	Values	Units
R _{th(j-c)}	Thermal Impedance, max.	Junction to Case(TOTAL)	0.14	°C/W
R _{th(c-s)}	Thermal Impedance, max.	Case to Heat sink	0.07	°C/W

Electrical Characteristics

Symbol	Item	Conditions	Values	Units
V _{FM}	Forward Voltage Drop, max.	T=25°C I _F =150A	1.35	V
I _{IRRM}	Repetitive Peak Reverse Current, max.	T _{vj} =25°C V _{RD} =V _{RRM} T _{vj} =150°C V _{RD} =V _{RRM}	≤2 ≤10	mA



◆Thyristor

Maximum Ratings

Symbol	Item	Conditions	Values	Units
I _{TAV}	Average On-State Current	T _C =93°C, Single Phase half wave 180° conduction	150	A
I _{TSM}	Surge On-State Current	T _{VJ} =45°C t=10ms (50Hz), sine VR=0	1500	A
i ² t	Circuit Fusing Consideration		11250	A ² s
Visol	Isolation Breakdown Voltage(R.M.S)	a.c.50HZ;r.m.s.;1 min	3000	V
T _{VJ}	Operating Junction Temperature		-40 to +125	°C
T _{STG}	Storage Temperature		-40 to +125	°C
M _T	Mounting Torque	To terminals(M4)	2±15%	Nm
M _T		To terminals(M6)	5±15%	
M _S		To heatsink(M6)	5±15%	Nm
di/dt	Critical Rate of Rise of On-State Current	T _{VJ} =T _{VJM} , V _D =1/2V _{DRM} , I _G =100mA d _{iG} /d _t =0.1A/μs	150	A/μs
dv/dt	Critical Rate of Rise of Off-State Voltage, min.	T _J =T _{VJM} , V _D =2/3V _{DRM} , linear voltage rise	500	V/μs

Electrical and Thermal Characteristics

Symbol	Item	Conditions	Values			Units
			Min.	Typ.	Max.	
V _{TM}	Peak On-State Voltage, max.	T=25°C I _T =150A			1.35	V
I _{RRM} /I _{DRM}	Repetitive Peak Reverse Current, max. / Repetitive Peak Off-State Current, max.	T _{VJ} =T _{VJM} , V _R =V _{RRM} , V _D =V _{DRM}			40	mA
V _{GT}	Gate Trigger Voltage, max.	T _{VJ} =25°C, V _D =6V			3	V
I _{GT}	Gate Trigger Current, max.	T _{VJ} =25°C, V _D =6V			150	mA
R _{th(j-c)}	Thermal Impedance, max.	Junction to Case			0.16	°C/W
R _{th(c-s)}	Thermal Impedance, max.	Case to Heatsink			0.07	°C/W

Performance Curves

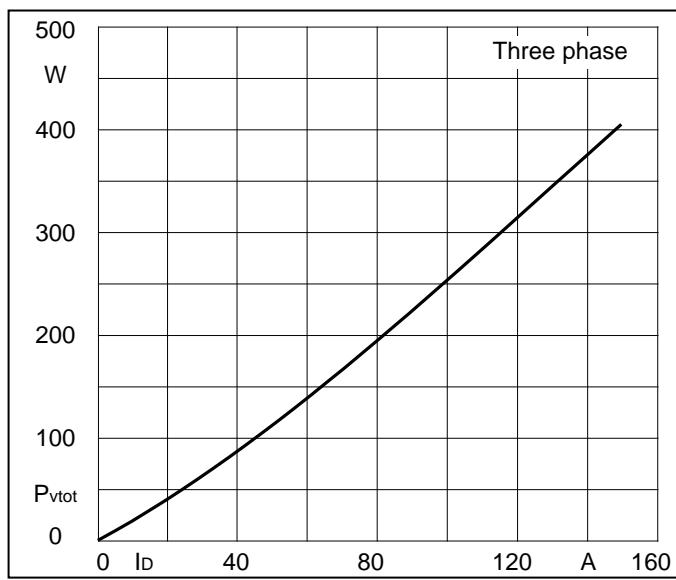


Fig1. Power dissipation

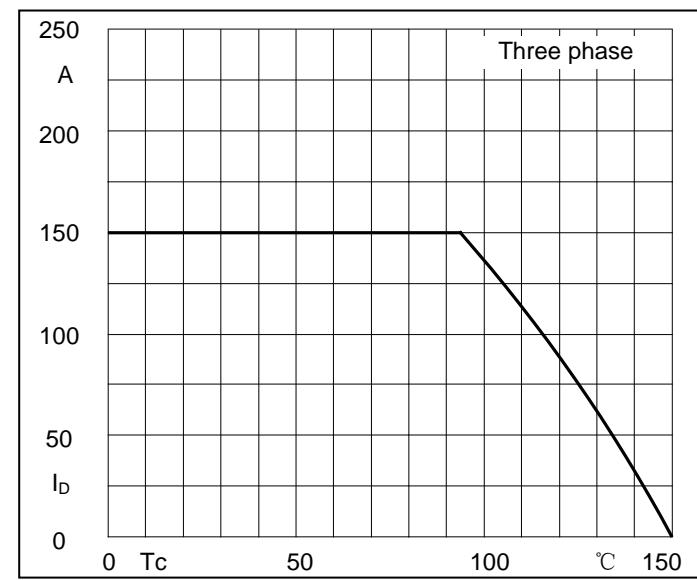


Fig2. Forward Current Derating Curve

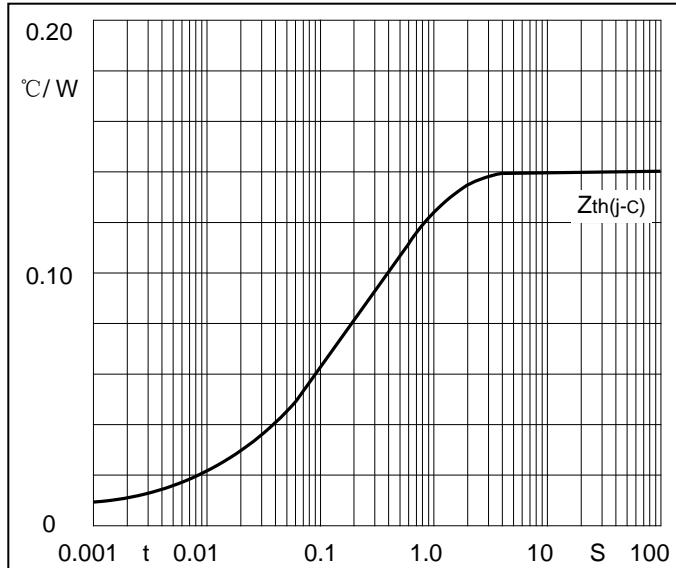


Fig3. Transient thermal impedance

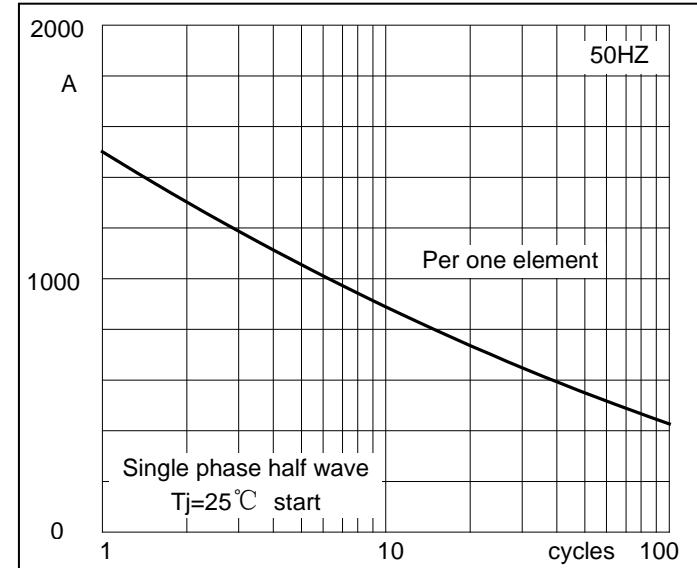


Fig4. Max Non-Repetitive Forward Surge Current

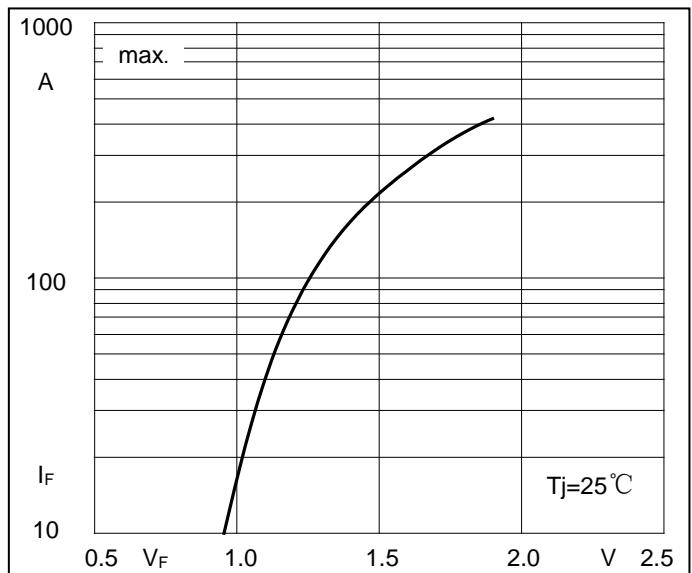


Fig5. Forward Characteristics

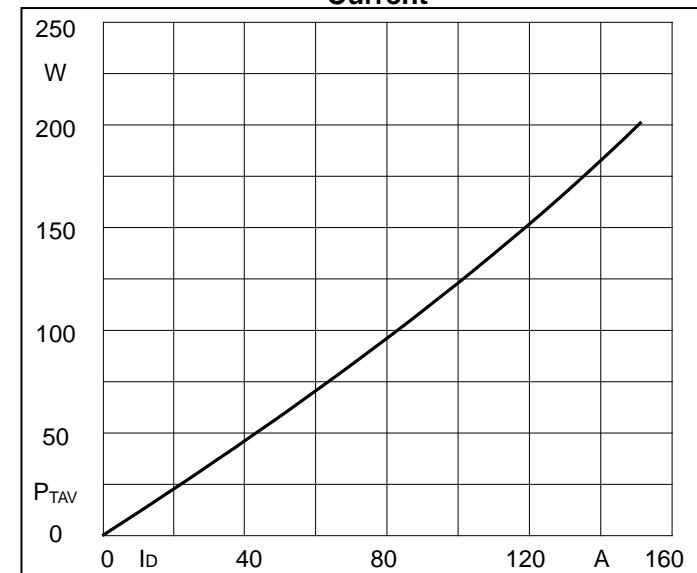
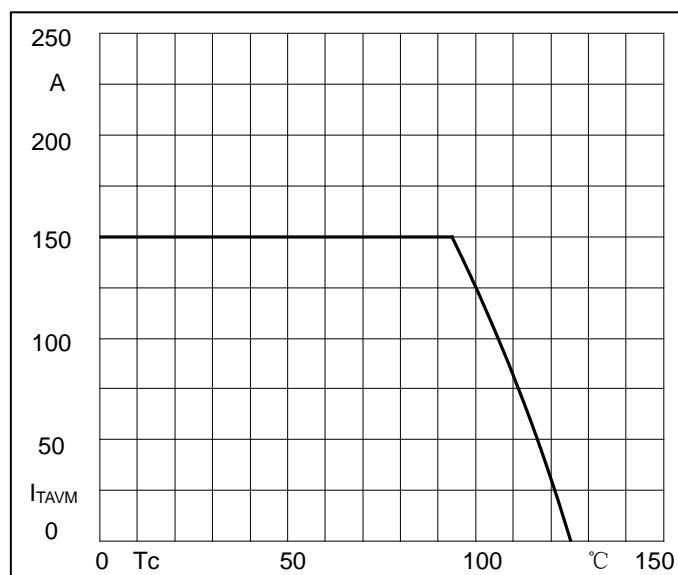
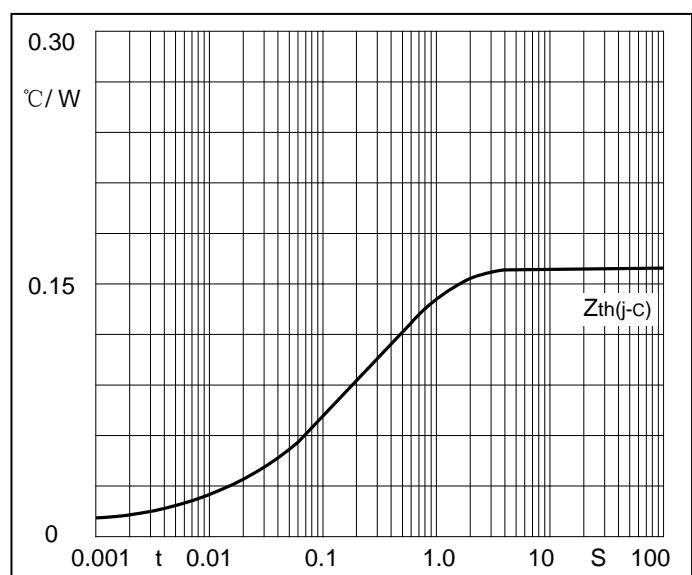
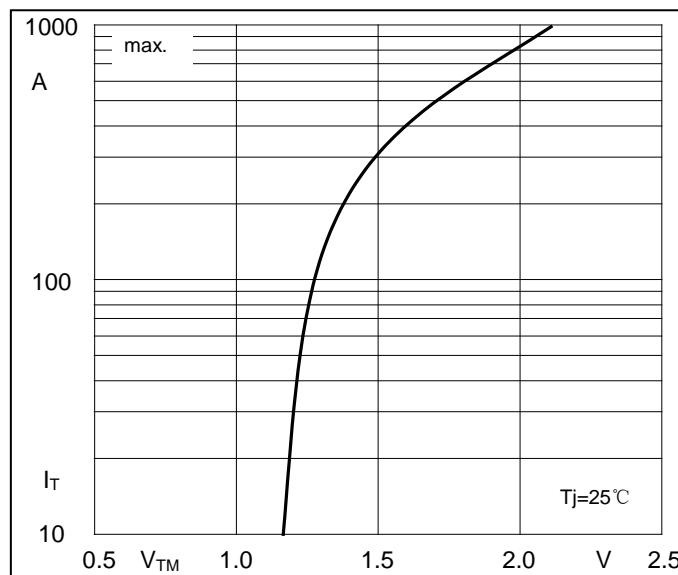
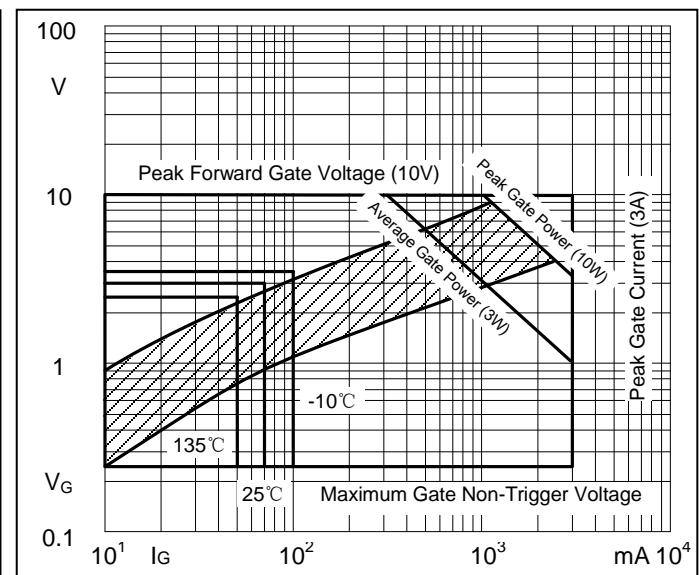
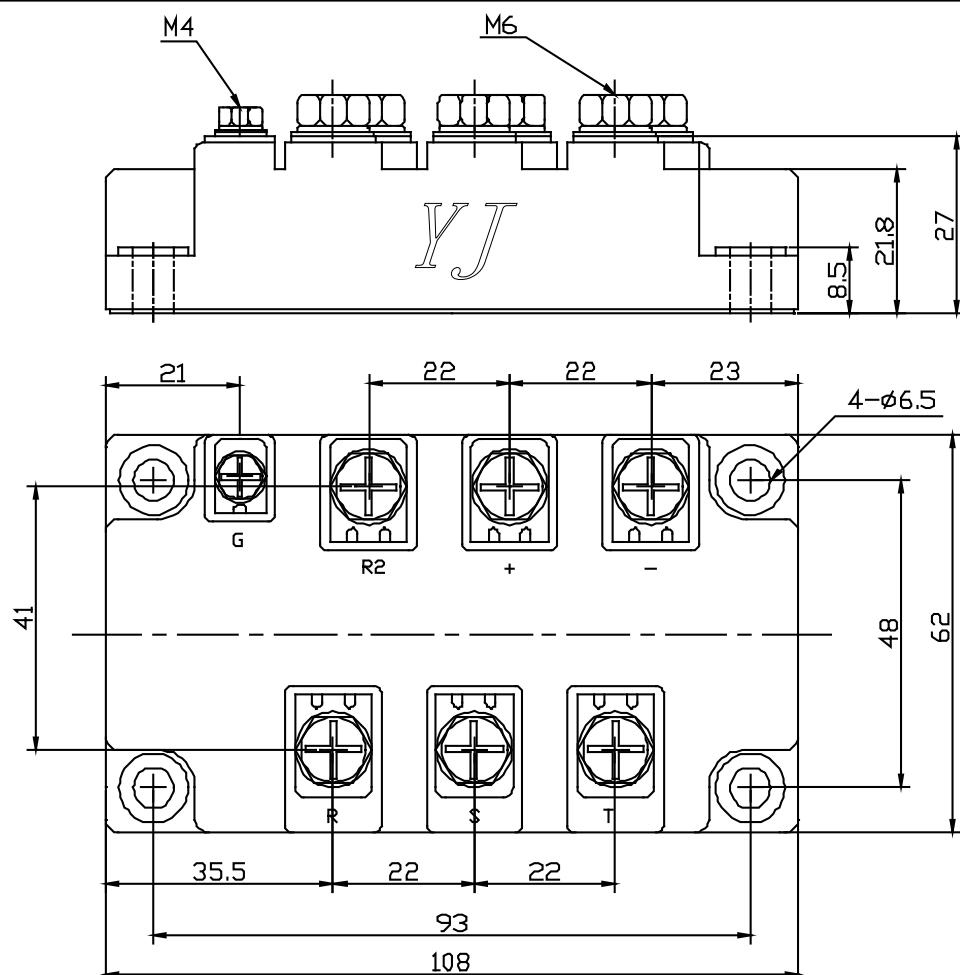


Fig6. SCR Power dissipation


Fig7. SCR Forward Current Derating Curve

Fig8. SCR Transient thermal impedance

Fig9. SCR Forward Characteristics

Fig10. Gate trigger Characteristics

Package Outline Information

CASE: L2



Dimensions in mm