

# SmartMP3™

Manual

*All Mikroelektronika's development systems feature a large number of peripheral modules expanding microcontroller's range of application and making the process of program testing easier. In addition to these modules, it is also possible to use numerous additional modules linked to the development system through the I/O port connectors. Some of these additional modules can operate as stand-alone devices without being connected to the microcontroller.*

**Additional Board**

 **MikroElektronika**

SOFTWARE AND HARDWARE SOLUTIONS FOR EMBEDDED WORLD ...making it simple

## SmartMP3

*SmartMP3* is an additional board used to reproduce audio files in mp3 format. In addition to the built-in speaker, *SmartMP3* includes connectors that enable additional speakers or headphones to be connected to the board. There is also an MMC/SD card connector provided on the board. The *SmartMP3* board uses the on-board audio decoder VS1011E to convert audio files in mp3 format into an audio signal to be reproduced through speakers.

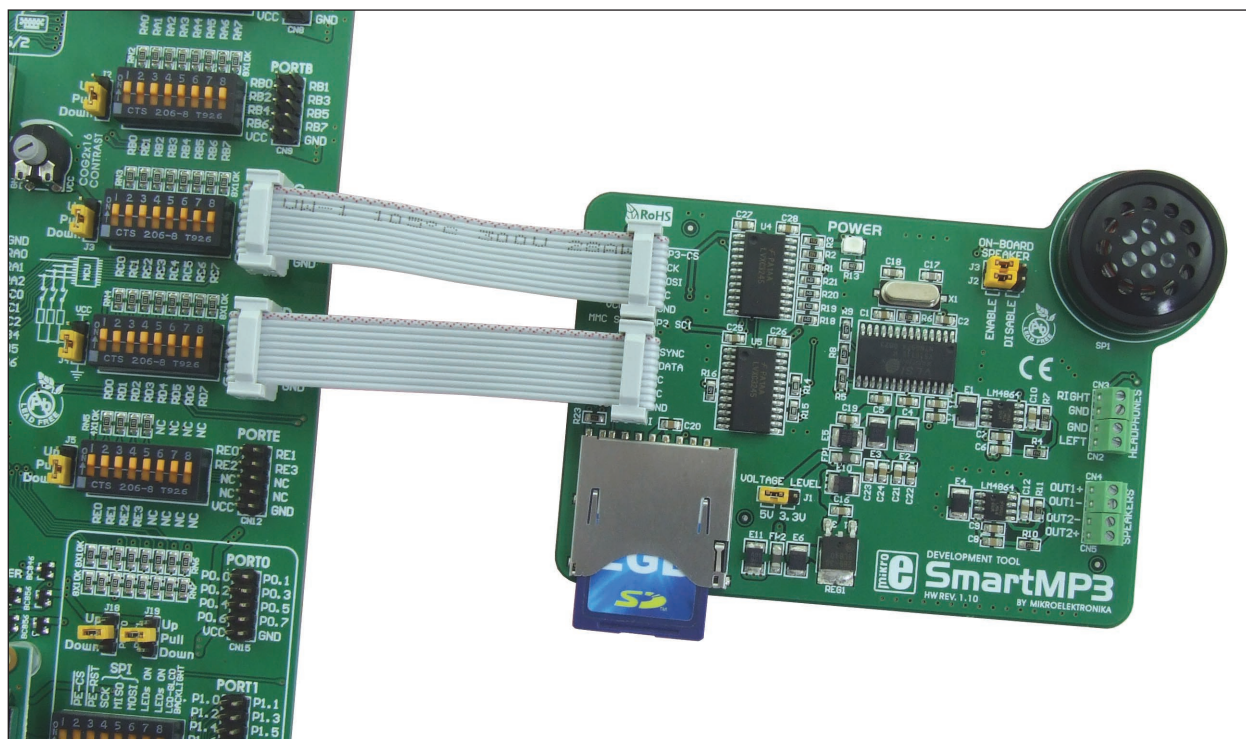


Figure 1-1: SmartMP3 connected to the development system

*SmartMP3* communicates with the microcontroller via SPI. The *SmartMP3* additional board is connected to the development system via flat cables with 2x5 female connector. With regard to the fact that different development systems use different power supply voltages, it is necessary to adjust *SmartMP3* voltage levels. It is performed through jumper J1 provided on the *SmartMP3* board. In case that development system uses 3.3V power supply voltage, it is necessary to place jumper J1 in 3.3V position. Otherwise, jumper J1 should be left in its default position (5V).

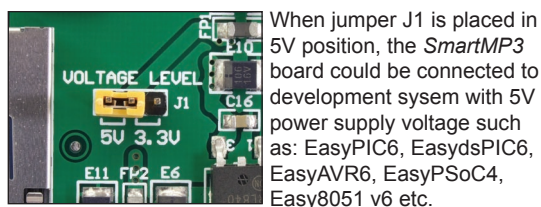


Figure 1-2: J1 in 5V position

When jumper J1 is placed in 5V position, the *SmartMP3* board could be connected to development system with 5V power supply voltage such as: EasyPIC6, EasydsPIC6, EasyAVR6, EasyPSoc4, Easy8051 v6 etc.

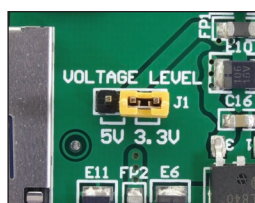


Figure 1-3: J1 in 3.3V position

When jumper J1 is placed in 3.3V position, the *SmartMP3* board could be connected to development system with 3.3V power supply voltage such as: LV18F v6, EasyLV-18Fv6, LV24-22 v6, LV-32MX v6 etc.

In addition to jumper J1, the *SmartMP3* board includes jumpers J2 and J3 used to turn on/off the built-in speaker as well as additional one connected to the board via the CN4 connector. The *SmartMP3* board also enables you to connect another additional speaker via the CN5 connector. The built-in speaker is turned on by placing jumpers J2 and J3 in ENABLE position. When jumpers J2 and J3 are placed in DISABLE position, the built-in speaker is turned off, thus enabling the additional speaker to be connected through the CN4 connector.




Figure 1-4: Built-in speaker is on



Figure 1-5: Built-in speaker is off

In addition to the above mentioned speakers, the *SmartMP3* board enables you to connect headphones via CN2 and CN3 connectors.

A LED POWER is used to indicate the operation of the *SmartMP3* board.

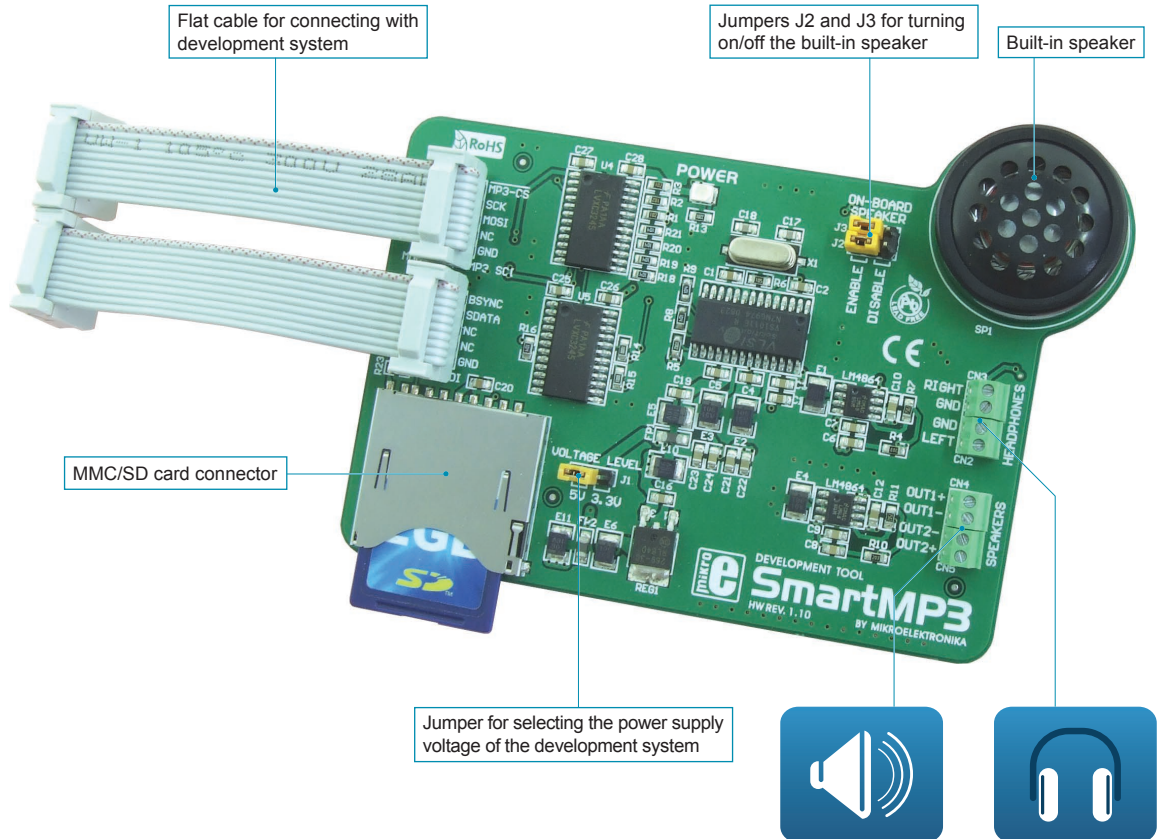

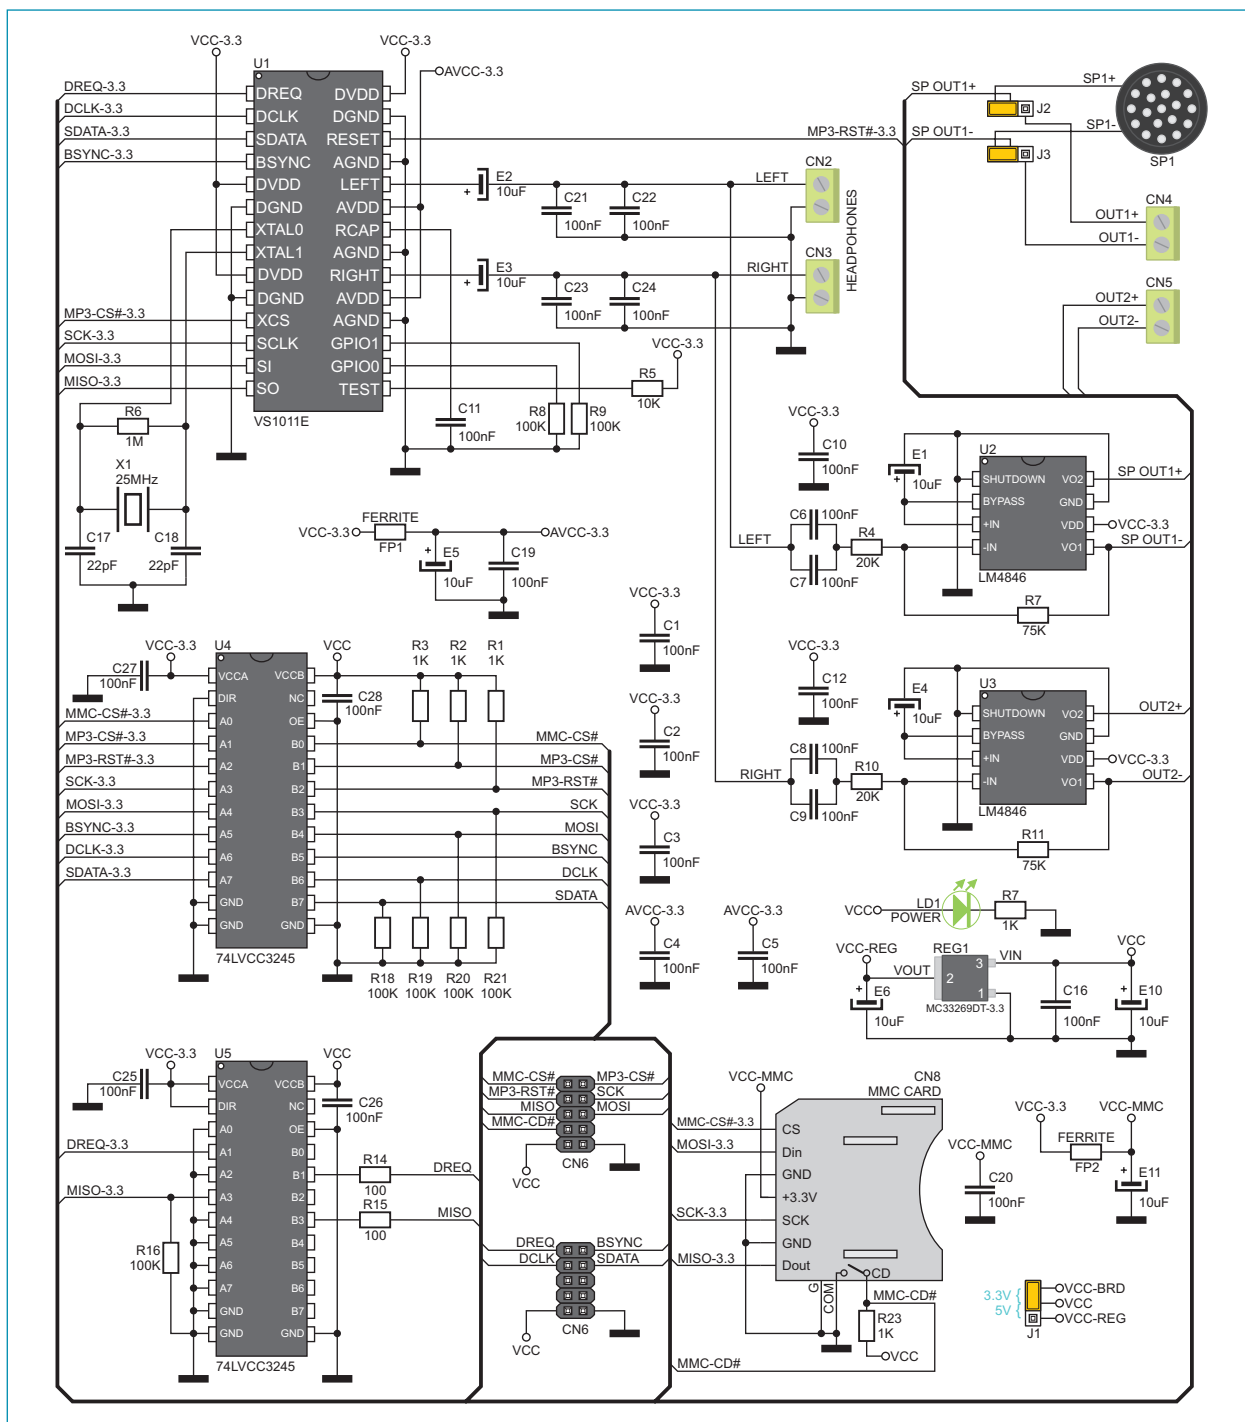


Figure 1-6: SmartMP3 additional board connection schematic





**MikroElektronika**  
SOFTWARE AND HARDWARE SOLUTIONS FOR EMBEDDED WORLD ...making it simple

Ukoliko želite da saznate više o našim proizvodima, posetite naš web sajt: [www.mikroe.com](http://www.mikroe.com)

Ukoliko imate problem sa nekim od naših proizvoda ili želite dodatne informacije, pošaljite Vaš tiket na : [www.mikroe.com/en/support](http://www.mikroe.com/en/support)

Ukoliko imate dodatna pitanja, komentare ili poslovne predloge, možete nam pisati na: [office@mikroe.com](mailto:office@mikroe.com)