

6

5

4

3




2

1

APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	6/09/10	
A		REDRAWN	9/18/12	

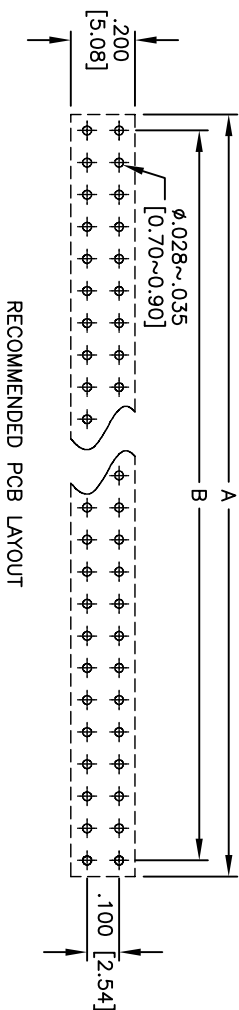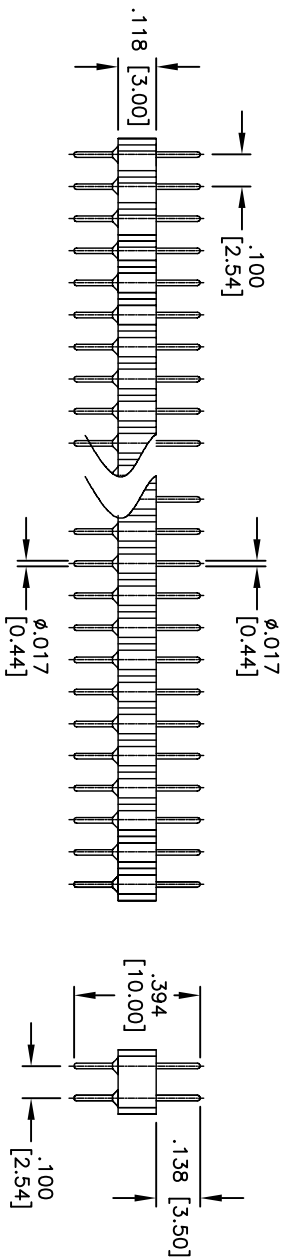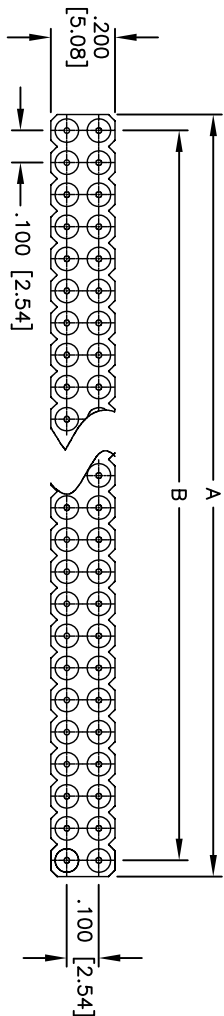

SPECIFICATIONS:
 Material: Polyamide, glass reinforced, rated UL 94V-0
 Insulator color: Black
 Pin (Our Sleeve): Brass
 Plating:
 Gold flash over Nickel underplate overall.

Electrical:
 Voltage rating: 100V RMS/150 VDC
 Current rating: 3 Amp max
 Insulation resistance: 10000MΩ min @ 500VAC
 Temperature Rating:
 Operating temperature: -40°C to +105°C
 Environmental:
 Lead free, RoHS compliant



Positions: 2 thru 80
 A = .100 [2.54] x No. of Positions per Row
 B = .100 [2.54] x No. of Spaces

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: SCREW MACHINE TERMINAL STRIP- DUAL ROW STRAIGHT, .100" PITCH, GOLD PLATED

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES [MM]		TOLERANCES: EXCEPT AS NOTED IN INCHES		HOLE SIZES	
.X	± .10	Ø.X	± .10		
.XX	± .020	Ø.XXX	± .015		
.XXX	± .015	Ø.XXXX	± .010		
APPROVALS		DATE		TITLE	
DRAWN	DY	6/09/10		PART NO.	
CHECKED				MCT-2-XX-1-G	
APPROVED				SIZE	REV.
				X	A
REF: S00007T		SCALE: NTS		SHEET 1 OF 1	

6

5

4

3

2

1