


stonecold

PM-30X30-18

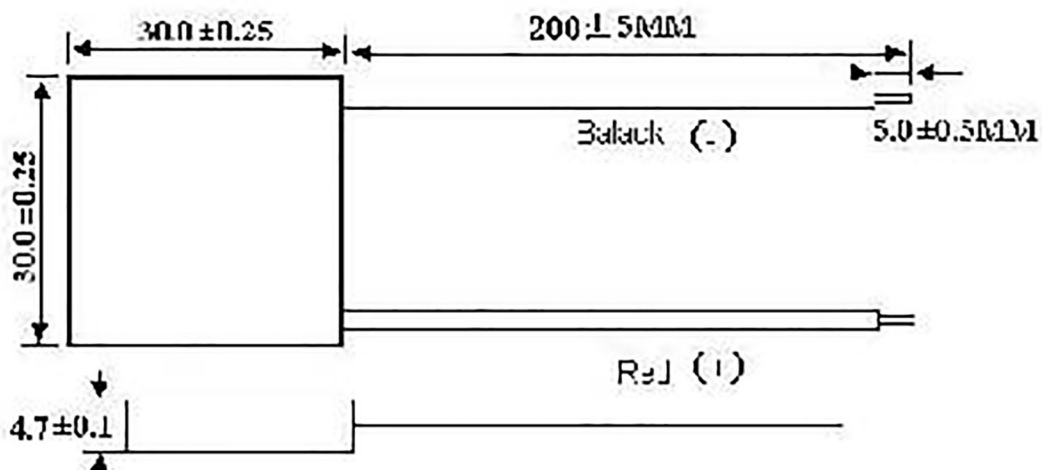


No.	Items	Symbol	Parameter	Condition
1	Max. Operating Tem.	T	200°C	
2	Max. Cooling Power	Q _{max}	20	Vacuum testing Tem T _h =30°C
3	Tem. Difference Max	ΔT _{max}	66	Vacuum testing Tem T _h =30°C
4	Input Voltage Max.	V _{max}	8.5	Vacuum testing Tem T _h =30°C
5	Max. Current	I _{max}	3.4	Vacuum testing Tem T _h =30°C
6	Resistance	R	1.85±0.1	Ambient Tem. T _h =25°C
7	Parallel		≤0.05 mm	
8	Lines		20AWG	

When the ambient temperature raise or fall 1°C, the module resistance will raise or fall 0.015 accordingly


stonecold

PM-30X30-18

Vin - I - TC Graph Th=50°C

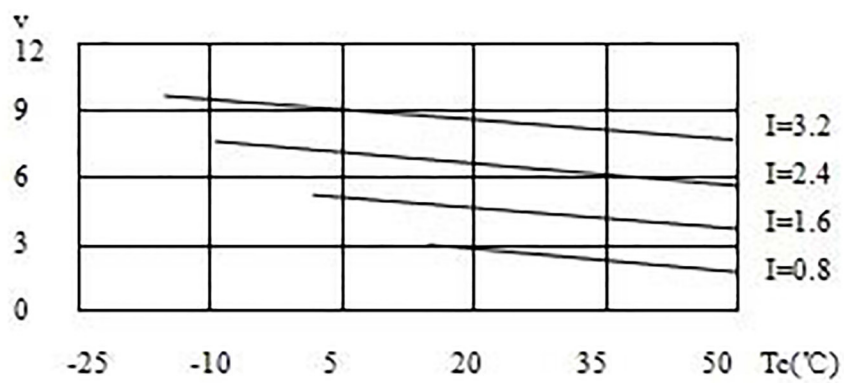

Qc - I - DT Graph Th=50°C

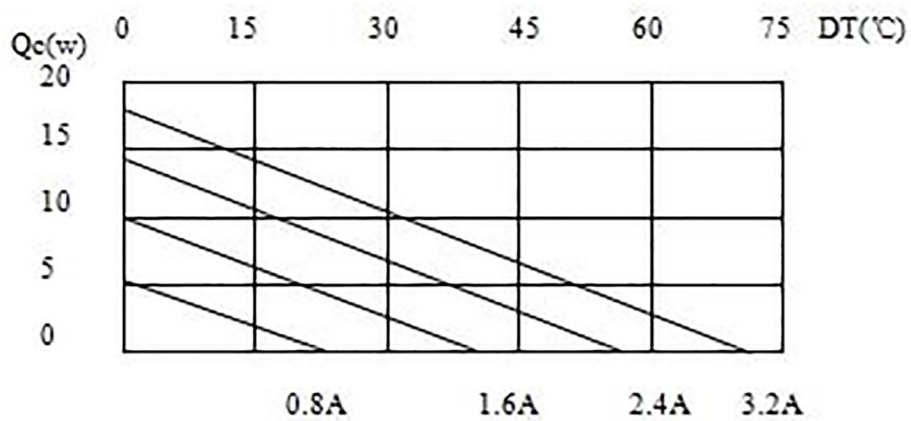

stonecold

PM-30X30-18

Qc vs. I

