

# TWN4 MULTITECH 2 PANEL HOUSING

## PLASTIC HOUSING FOR EXTERNAL INSTALLATION OF RFID READERS



with LED holes



without LED holes

### Special features:

- + upon request the housing can be delivered with or without LED holes
- + upon request the housing can be delivered with customized inlay
- + compatible only with TWN4 MultiTech 2 reader PCBs
- + 3D construction data (STEP) available on request

### TECHNICAL DATA

DIMENSIONS (L X W X H)	80.5 mm x 55 mm x 13.5 mm / 3.17 inch x 2.17 inch x 0.53 inch
MATERIAL	PC UL94-V0, color: black
TEMPERATURE RANGE	Operating: -25 °C up to +70 °C (-13 °F up to +158 °F)
SAFETY CLASS <sup>1)</sup>	IP65
WEIGHT	Approx. 16.5 g (without rubber seal)
PACKAGE CONTENTS	PC housing, rubber seal (various thickness levels), 4 x screws (3.5 mm x 12 mm -H2), inlay
ORDER CODE(S)	HOP2-CBLEL (with LED holes)      TBD (without LED holes)

<sup>1)</sup>The product was mounted on a planar steel surface during the classification test. Other surfaces could result in another classification



Elevator



EV Chargers



Access



Shop POS



Fitness  
Equipment



Ticket POS



PC Log-on



Document  
Management



Driver ID



Vending



Parking



Gaming



Locker Locks




Time  
Attendance




Industrial  
PC

MEASUREMENTS TEMPLATE\*

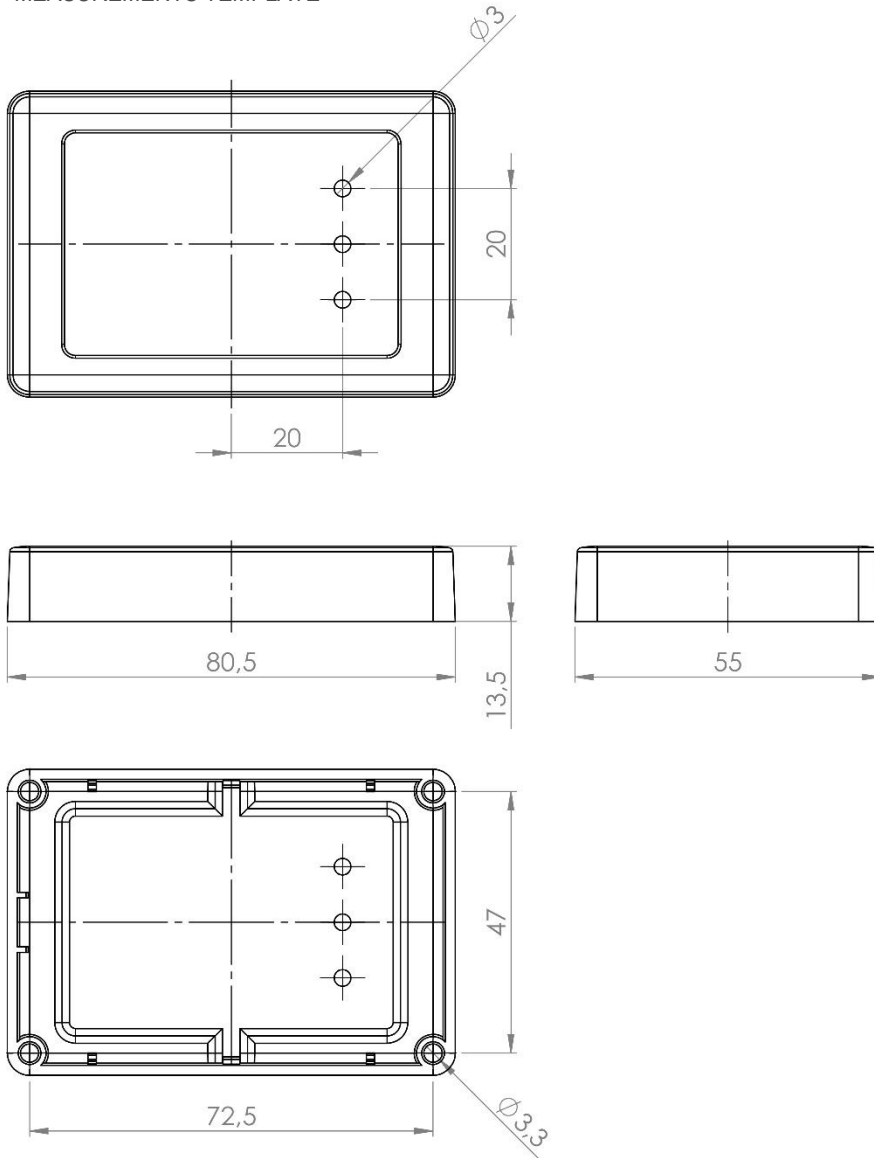

\*All drawing measures in mm.

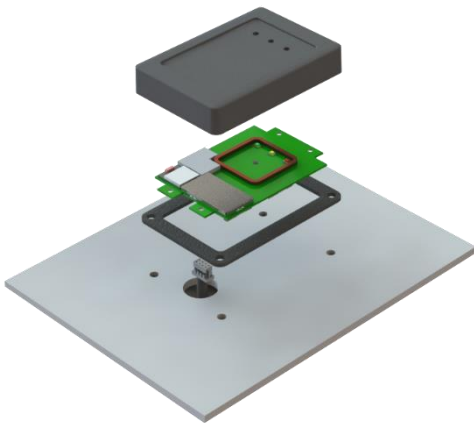

ELATEC GmbH • Zeppelinstr. 1 • 82178 Puchheim • Germany  
 P +49 89 552 9961 0 • F +49 89 552 9961 129 • E-Mail: info-rfid@elatec.com  
 elatec.com



Elatec reserves the right to change any information or data in this document without prior notice. Elatec declines all responsibility for the use of this product with any other specification but the one mentioned above. Any additional requirement for a specific customer application has to be validated by the customer himself at his own responsibility. Where application information is given, it is only advisory and does not form part of the specification. Disclaimer: All names used in this document are registered trademarks of their respective owners.