

Product Brief

SPB209A WLAN and Bluetooth Module

High Performance Dual Band Wifi ac/a/b/g/n, Bluetooth 4.2

INTRODUCTION

SPB209A is a complete WLAN and Bluetooth Dual-mode module ready for onboard integration in Linux platforms. The ultra-small 14x14x2.5mm low power, high performance module enables a feature rich client solution providing up to 433Mbit/s data rate. SPB209A fully supports concurrent or independent operation of WLAN and Bluetooth. The SPB209A connects to the host through SDIO and high speed UART interfaces. The module comes in versions with or without integrated antenna and LTE filter supporting shortest time to market for multimedia, industrial and smart home products.

With the SPB209A developers are targeting a wide range of applications including

- Wireless home audio and video entertainment systems including, set-top boxes, Blu-ray/ DVD players, media servers, and gaming platforms
- Consumer electronic devices such as Portable Media devices, IP-radio, home security, wireless speakers and IP audio devices.
- Smart control and monitor of renewable energy

The SPB209A is highly integrated and its complete system functionality, means quicker design cycles, lower risk and simplified manufacturing, all in a ultra-small package. The SPB209A delivers a complete and fully tested implementation of 802.11 a/b/g/n/ac and BT4.2 functionality. The SPB209A solution is calibrated and FCC, CE certified resulting in lowest possible customer production and system cost.

H&D Wireless AB

H&D Wireless AB is a Global Smart Home solution provider. Making Cloud Connectivity easy for SmartHome, M2M, IoT, Multimedia applications and sensor networks.



SPB209A EVB

WLAN 802.11a/b/g/n/ac, BT4.2



SPB209A



Add 11.ac Wi-Fi capability to your Linux platforms!

Wi-Fi is a registered trademark of the Wi-Fi Alliance

KEY FEATURES – SPB209A

- ✓ IEEE 802.11ac compliant
- ✓ IEEE 802.11 PHY data rates of up to 433 Mbps
- ✓ Driver support for Linux
- ✓ Advanced Power management system allowing “Always On”
- ✓ Bluetooth 4.2
- ✓ Internal co-existence arbitration
- ✓ FCC and CE approved reference design
- ✓ Interfaces SDIO 3.0, HS UART, PCM
- ✓ Industrial temp range -40 to +85C°
- ✓ High RF output TX power
- ✓ Supports multiple SW features such as 802.11e/i (Security, QoS), Soft AP and Wi-Fi Direct
- ✓ Extensive DMA hardware support for data flow to reduce CPU load
- ✓ RoHS compliant

Headquarters
H&D Wireless AB
Kista Science Tower
Färögatan 33
164 51 Kista, Sweden
Tel: +46-8-55118460

E-mail:
sales@hd-wireless.se
info@hd-wireless.se

International
North America
H&D Wireless AB
E-mail:
sales@hd-wireless.se

Global Presence & Distribution
- NORTH AMERICA
- EUROPE
- ASIA
- MIDDLE EAST
- AUSTRALIA
- SOUTH AMERICA


Technical Support
Software drivers
Wi-Fi Integration
Reference designs
Documentation

Turnkey Solutions
Reference designs
Reference design modification to customer specific needs
Customer specific application support and development

© H&D Wireless AB
All rights reserved.

www.hd-wireless.com

SPB209A Block diagram

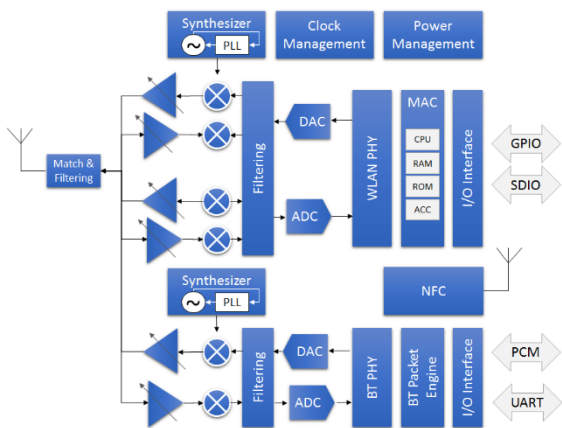

Software

The SPB209A device driver implements and reuses tools and interfaces that are de-facto standard in Linux systems. Conceptually, the Linux driver could be used on any host platform that supports Linux.

Demo images available for the following platforms:



Wireless HD video streaming

Add Wi-Fi capability to your Linux platform!

H&D Wireless Linux driver distribution is license free

support.hd-wireless.com

Support for Application and Turnkey Development

- Reference designs
- Reference design modification to customer specific needs
- Customer specific application support and development

Evaluation Package

SPB209A based evaluation is supported with the HDA209 evaluation kit in SDIO board format

Distribution

H&D Wireless products are available through several distribution channels.

Contact H&D Wireless Sales representative or visit the webpage.

| | |
|-----------------------------------|---|
| Wireless Network Standard Support | IEEE 802.11a/b/g/n/ac, BT4.2 |
| Frequency Band | Dual, 2.4/5 GHz |
| Data rates | 802.11 a/b/g standard rates 802.11n 20/40Mhz channels 802.11ac 20/40/80Mhz channels up to 433Mbps Bluetooth BR, EDR 2Mbps |
| Hardware interfaces | SDIO 3.0, UART, GPIO:s – Host / PCM – BT Audio |
| WLAN functions, QoS | Power save modes, automatic roaming, Ad-hoc, Soft AP, Wi-Fi Direct and Infrastructure mode |
| Wireless Security | <ul style="list-style-type: none"> ✓ WEP-64 ✓ WEP-128 ✓ WPA-PSK ✓ WPA2-PSK |
| NFC | Functions: R/W, Card Emulation and P2P |
| Bluetooth | BT for stereo audio and data BLE for fast configuration and sensor data upload |
| HW dimensions | 14 mm x 14 mm x 2.5 mm |
| Output power | 802.11 b: 18 dBm 802.11 a/g/n/ac: 15 dBm Bluetooth: 7 dBm |
| Power consumption | 2.5GHz HT20: Wi-Fi IEEE 802.11 b TX 295mA RX:51mA Wi-Fi IEEE 802.11 g/n/ac: TX 285mA / RX 66mA 5GHz HT80: Wi-Fi IEEE 802.11 ac MCS9: TX 330mA / RX 121mA BT BT TX (+4dBm) 22mA / RX 17mA |
| Supply Voltage | 3.0-3.6V |
| Operating Temp. | -40 to + 85°C (industrial) |

Design and specification are subject to change without notice.

Specification

| Product number | Description | Format |
|----------------|--|---------|
| SPB209A-LRNMQ | 41 pin SMD module. No antenna and no LTE filter | 14x14mm |
| SPB209A-LRLMQ | 41 pin SMD module. No antenna and with LTE filter | 14x14mm |
| SPB209A-LBNMZ | 38 pin SMD module. With antenna and no LTE filter | 14x21mm |
| SPB209A-LBLMZ | 38 pin SMD module. With antenna and LTE filter | 14x21mm |