



ELECTRONICS, INC.
44 FARRAND STREET
BLOOMFIELD, NJ 07003
(973) 748-5089
<http://www.nteinc.com>

NTE2583
Silicon NPN Transistor
High Speed Switching Regulator
TO-220 Full Pack

Features:

- High Breakdown Voltage and High Reliability
- Fast Switching Speed
- Wide ASO

Absolute Maximum Ratings: ($T_A = +25^\circ\text{C}$ unless otherwise specified)

Collector-Base Voltage, V_{CBO}	500V
Collector-Emitter Voltage, V_{CEO}	400V
Emitter-Base Voltage, V_{EBO}	7V
Collector Current, I_C	
Continuous	10A
Pulsed (Note 1)	20A
Collector Dissipation ($T_A = +25^\circ\text{C}$), P_C	2W
Collector Dissipation ($T_C = +25^\circ\text{C}$), P_C	35W
Operating Junction Temperature, T_J	+150°C
Storage Temperature Range, T_{stg}	-55° to +150°C

Note 1. Pulse Width $\leq 300\mu\text{s}$, Duty Cycle $\leq 10\%$.


Electrical Characteristics: ($T_A = +25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Collector Cutoff Current	I_{CBO}	$V_{CB} = 400\text{V}$, $I_E = 0$	-	-	10	μA
Emitter Cutoff Current	I_{EBO}	$V_{EB} = 5\text{V}$, $I_C = 0$	-	-	10	μA
DC Current Gain	h_{FE}	$V_{CE} = 5\text{V}$, $I_C = 1.6\text{A}$	20	-	50	
		$V_{CE} = 5\text{V}$, $I_C = 8\text{A}$	10	-	-	
		$V_{CE} = 5\text{V}$, $I_C = 10\text{mA}$	10	-	-	
Current Gain-Bandwidth Product	f_T	$V_{CE} = 10\text{V}$, $I_C = 1.6\text{A}$	-	20	-	MHz
Output Capacitance	C_{ob}	$V_{CB} = 10\text{V}$, $f = 1\text{MHz}$	-	120	-	pF
Collector-Emitter Saturation Voltage	$V_{CE(\text{sat})}$	$I_C = 6\text{A}$, $I_B = 1.6\text{A}$	-	-	0.8	V
Base-Emitter Saturation Voltage	$V_{BE(\text{sat})}$	$I_C = 6\text{A}$, $I_B = 1.6\text{A}$	-	-	1.5	V

Electrical Characteristics (Cont'd): ($T_A = +25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Collector-Base Breakdown Voltage	$V_{(\text{BR})\text{CBO}}$	$I_C = 1\text{mA}, I_E = 0$	500	-	-	V
Collector-Emitter Breakdown Voltage	$V_{(\text{BR})\text{CEO}}$	$I_C = 5\text{mA}, R_{BE} = \infty$	400	-	-	V
Emitter-Base Breakdown Voltage	$V_{(\text{BR})\text{EBO}}$	$I_E = 1\text{mA}, I_C = 0$	7	-	-	V
Collector-Emitter Sustaining Voltage	$V_{\text{CEX(sus)}}$	$I_C = 4.5\text{A}, I_{B1} = 0.45\text{A}, I_{B2} = -1.8\text{A}, L = 500\mu\text{H}$, Clamped	400	-	-	V
Turn-On Time	t_{on}	$I_C = 7\text{A}, I_{B1} = 1.4\text{A}, I_{B2} = 2.8\text{A}, R_L = 28.6\Omega, V_{CC} = 200\text{V}$, Note 2	-	-	0.5	μs
Storage Time	t_{stg}		-	-	2.5	μs
Fall Time	t_f		-	-	0.3	μs

Note 2. Pulse Width = 20 μs , Duty Cycle $\leq 1\%$.

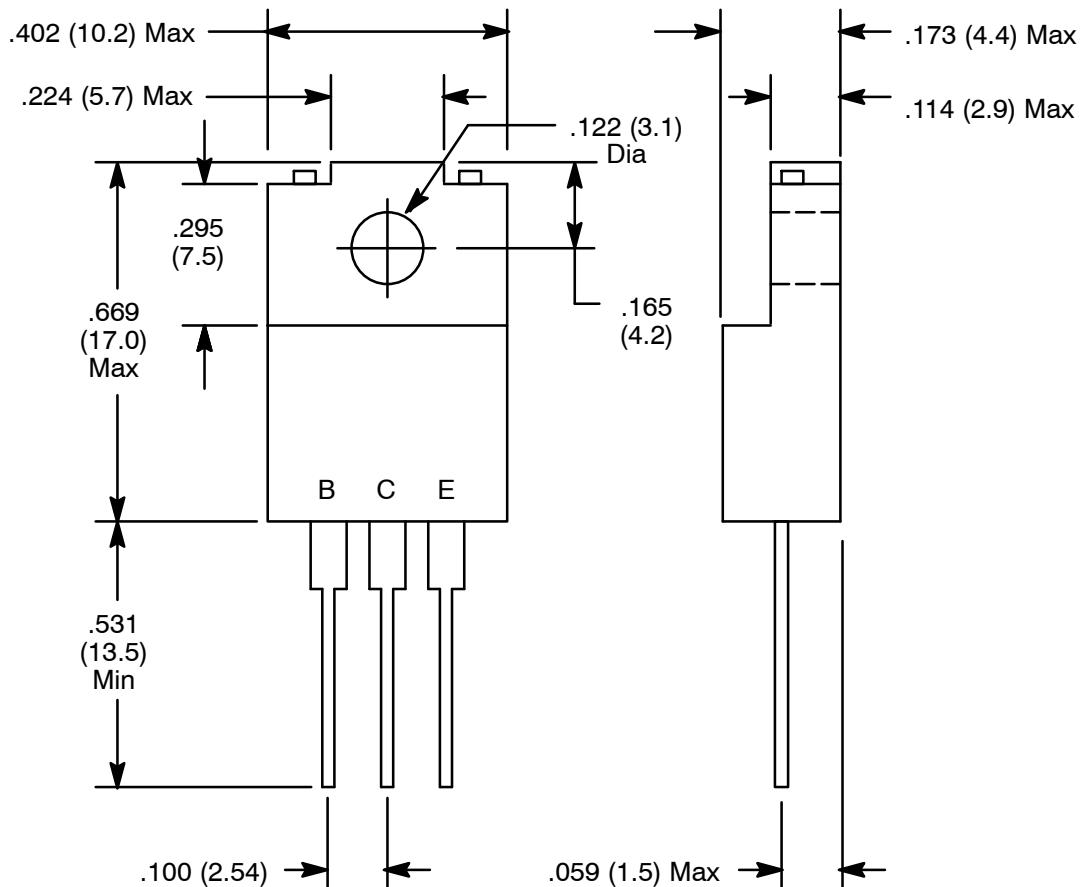

NOTE: Tab is isolated