

Fuseholder Open Design, 5 x 20 mm, Solder, transparent, Cover



250 VAC · 6.3A




Description

- Screw or rivet fastening
- Solder terminals

Weblinks


[pdf datasheet](#), [html-datasheet](#), [General Product Information](#), [Packaging details](#), [Approvals](#), [CE declaration of conformity](#), [RoHS](#), [CHINA-RoHS](#), [REACH](#), [Distributor-Stock-Check](#), [Accessories](#), [Detailed request for product](#), [Microsite](#)

Technical Data

Fuse-Link	5 x 20 mm	Soldering Methods	Iron
Mounting	Screw		Soldering Profile
Attachment	Screw or Rivet	Solderability	350 °C / 2 sec acc. to IEC 60068-2-20, Test Ta, method 2
Terminal	Solder	Resistance to Soldering Heat	350 °C / 10 sec acc. to IEC 60068-2-20, Test Tb, method 2
Rated Voltage	250 VAC	Contact Resistance	< 10 mΩ at 20 mV
Rated current	6.3 A	Dielectric Strength	> 3 kV (50 Hz; 1 min)
Admissible Ambient Air Temp.	-40 °C to 85 °C	Impulse Withstand Voltage	> 4 kV between L-N
Climatic Category	40/085/21 acc. to IEC 60068-1	Insulation Resistance	> 10 MΩ between L-N (500 VDC; 1 min)
Material: Socket	Thermoplastic, Nature, UL 94V-1		
Material: Cover	Thermoplastic Transparent UL 94V-0		
Material: Terminals	Tin-Plated Copper Alloy		
Unit Weight	1.5 g		
Storage Conditions	0 °C to 60 °C, max. 70% r.h.		
Product Marking	 Rated Voltage, Rated current, Approvals		


Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in [General Product Information](#)

Dimension [mm]

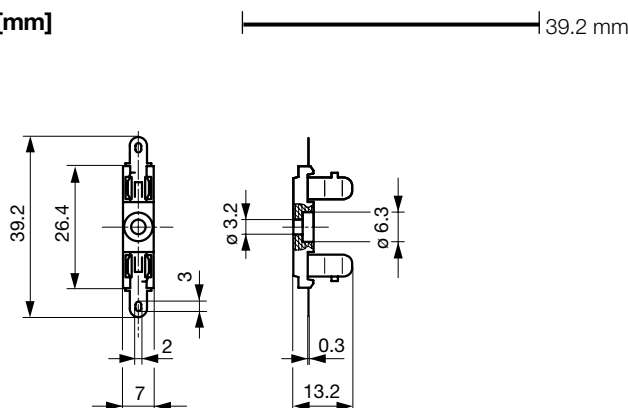


Derating Curves

without Cover

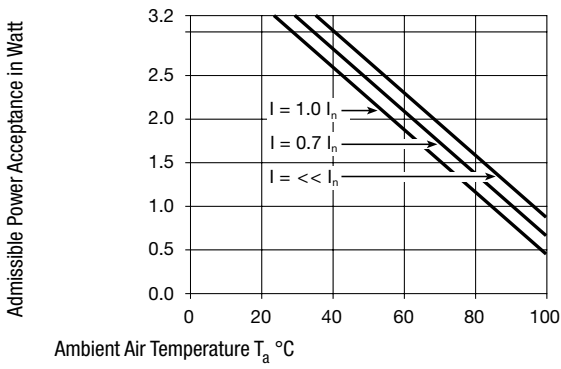

with cover

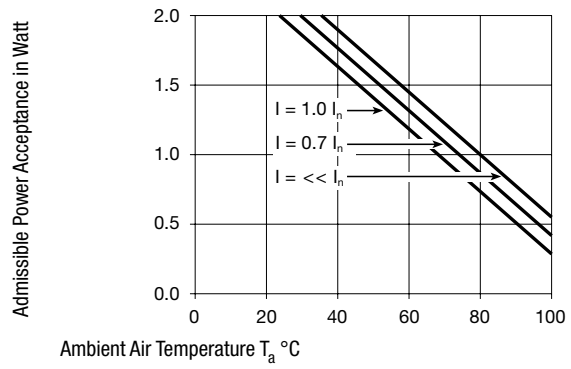

All Variants

Holder	Order Number
●	0031.5101

Most Popular.

Availability for all products can be searched real-time:
<http://www.schurter.com/en/Stock-Check/Stock-Check-SCHURTER>

Packaging Unit Bulk (1000 pcs.)

Accessories

Description



Cover OG, UHB, UH
Cover for Holder OG (Clip) 5x20, OG (Halter) 5x20, UH, UHB