

Shock-Safe Fuseholder, 6.3 x 32 mm, Fingerrip, Rear-Side, NF



250 VAC · 2.5W/10A (NF)10A (UL/CSA)



Description

- Screw type fuse carrier

Standards

- UL 4248-1 / UL 512
- CSA C22.2 no. 39
- NF C 93-436 - Modell HB02
- Contrôle de Conformité de Qualité (CCQ)

Approvals

- Approval Reference Type: 23312P
- UL File Number: E41738
- CSA Certification Record: 23151

Weblinks


[pdf datasheet](#), [html-datasheet](#), [General Product Information](#), [Packaging details](#), [Approvals](#), [RoHS](#), [CHINA-RoHS](#), [REACH](#), [Distributor-Stock-Check](#), [Detailed request for product](#), [Microsite](#)

Technical Data

Fuse-Link	6.3 x 32mm	Soldering Methods	Iron
Mounting	Panel Mount, Rear Side		Soldering Profile
Attachment	Fixing Nut	Contact Resistance	< mΩ at 20 mV
Terminal	Solder	Resistance to Vibration	acc. to NF C 20-706 / IEC 60068-2-6, test Fc
Rated Voltage	250VAC	Shocks	acc. to NF C 20-706 / IEC 60068-2-27
Rated current	10A (NF), 10A (UL/CSA)	Bumps	acc. to NF C 20-729 / IEC 60068-2-29
Rated Power Acceptance IEC	2.5W / 10A @ Ta 23°C	Salt Mist	acc. to NF C 20-711 / IEC 60068-2-11
	Admissible power acceptance at higher ambient temperature see derating curves	Dump Heat	acc. to NF C 20-604
Degree of Protection	IP 40 / IP 67	Climatic Composite	acc. to NF C 20-619 Phases D and F
Protection Class	Suitable for appliances with protection class I or II acc. to IEC 61140	Admissible Torque on Fixing Nut	max 1.2Nm
Admissible Ambient Air Temp.	-40°C to 85°C	Panel Thickness	max 5mm
Climatic Category	40/085/21 acc. to IEC 60068-1		
Material: Socket	Thermoset, black		
Unit Weight	19 g		
Storage Conditions	0°C to 60°C, max. 70% r.h.		
Product Marking	Type, Rated Voltage, Rated current, Approvals, HB2		

Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in [General Product Information](#)

Dimension [mm]  54 mm

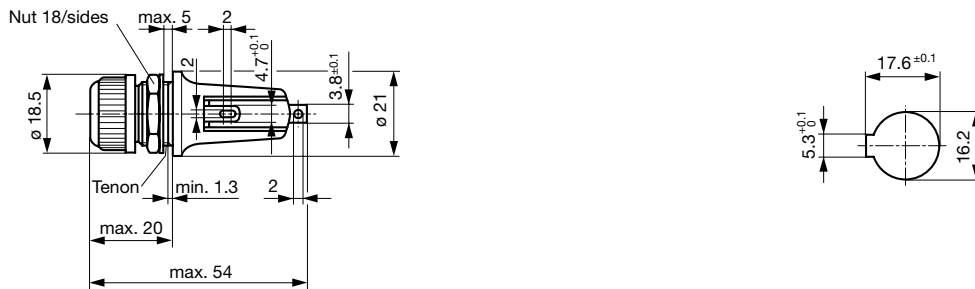

Mounting holes

All Variants

Holder	Cap	Fuse-Link	Degree of Protection	NF	RU	SE	GAM T1	NNO	Reference	Order Number
•	Fingergrip	6.3 x 32mm	IP 40	•	•	•			23312P	7092.2520
•	Fingergrip	6.3 x 32mm	IP 67						23312ERJJP	7092.2630

Most Popular.

Availability for all products can be searched real-time: <http://www.schurter.com/en/Stock-Check/Stock-Check-SCHURTER>

Packaging Unit Bulk (100 pcs.)