Features

- Ultra High Efficiency (Up to 94%)
- Constant Current Output
- 0-10V Dimmable and Dim-to-Off
- Standby Power ≤1.5 W
- Input Surge Protection: 4kV line-line, 6kV line-earth
- All-Around Protection: OVP, SCP, OTP
- Waterproof (IP67)
- SELV Output
- Suitable for EU Independent Use





Description

The EUC-320SxxxDV(SV) series is a 320W, constant-current outdoor LED driver that operates from 90-305 Vac input with excellent power factor. Created for high bay, high mast, arena and roadway lights, it provides a dim-to-off mode with low standby power. The high efficiency of these drivers and compact metal case enables them to run cooler, significantly improving reliability and extending product life. To ensure trouble-free operation, protection is provided against input surge, output over voltage, short circuit, and over temperature.

Models

Output	Input	Output	Max.	Typical	Power Factor			
Current	Voltage Range(1)	Voltage Range	Output Power	Efficiency (2)	120Vac	220Vac	Model Number	
1050 mA	90 ~ 305 Vac 127~250 Vdc	152~304Vdc	320 W	94.0%	0.99	0.96	EUC-320S105DV(SV)	
1400 mA	90 ~ 305 Vac 127~250 Vdc	114~228Vdc	320 W	94.0%	0.99	0.96	EUC-320S140DV(SV)	
2100 mA	90 ~ 305 Vac 127~250 Vdc	76~152 Vdc	320 W	94.0%	0.99	0.96	EUC-320S210DV(SV)	
2800 mA	90 ~ 305 Vac 127~250 Vdc	57~111 Vdc	310 W	93.0%	0.99	0.96	EUC-320S280DV(SV) (3)	
4900 mA	90 ~ 305 Vac 127~250 Vdc	33 ~65 Vdc	320 W	93.0%	0.99	0.96	EUC-320S490DV(SV) (3)	
6200 mA	90 ~ 305 Vac 127~250 Vdc	26 ~52 Vdc	320 W	93.0%	0.99	0.96	EUC-320S620DV(SV) (3)	

Notes: (1) Certified input voltage range: 100-240Vac /127-250Vdc

- (2) Measured at full load and 220 Vac input.
- (3) SELV Output

Input Specifications

Parameter	Min.	Тур.	Max.	Notes
Input Voltage	90 Vac	ı	305 Vac	127~250 Vdc
Input Frequency	47 Hz	-	63 Hz	
Leakage Current	-	1	0.70 mA	IEC60598-1; 240Vac/ 60Hz

1/10

Rev. B

320W Constant Current Outdoor Driver

Input Specifications (Continued)

Parameter Min.		Тур.	Max.	Notes
Input AC Current	-	ı	4.0 A	Measured at full load and 100Vac input.
input AC Current	-	-	2.0 A	Measured at full load and 220Vac input.
Inrush Current(I ² t)	-	-	3.5 A ² s	At 220Vac input 25°C cold start, duration= 4mS, 10%lpk-10%lpk. See Inrush Current Waveform for the details.
PF	0.90	-	-	At 100 277\/ac 759/ load 1009/ load
THD	-	-	20%	At 100-277Vac, 75%load-100%load

Output Specifications

Parameter	Min.	Тур.	Max.	Notes
Output Current Tolerance	-5%lo	-	5%lo	At full load condition
Total Output Current Ripple (pk-pk)	-	5%lo	10%lo	At full load condition, 20 MHz BW
Output Current Ripple at < 200 Hz (pk-pk)	-	2%lo	-	At full load condition. Only this component of ripple is associated with visible flicker.
Startup Overshoot Current	-	-	10%lo	At full load condition.
No load Output Voltage I_O = 1050 mA I_O = 1400 mA I_O = 2100 mA I_O = 2800 mA I_O = 4900 mA I_O = 6200 mA	- - - - -	- - - - -	338 V 258 V 172 V 120 V 76 V 60 V	
Line Regulation	-	-	\pm 0.5%	Measured at full load
Load Regulation	-	-	±1.5%	
Turn-on Delay Time	-	0.5 s	1.0 s	Measured at 120V and 220Vac input.
Temperature Coefficient of Io	-	-	0.03%/°C	Case temperature = 0°C ~Tc max
12V Auxiliary Output Voltage	10.8 V	12 V	13.2 V	
12V Auxiliary Output Source Current	0 mA	-	200 mA	Return terminal is "Dim-"

Note: All specifications are typical at 25 °C unless stated otherwise.

General Specifications

١	deficial Specifications							
Parameter		Min.	Тур.	Max.	Notes			
	Efficiency at 120 Vac input: I_O = 1050 mA I_O = 1400 mA I_O = 2100 mA I_O = 2800 mA I_O = 4900 mA I_O = 6200 mA	90.0% 90.0% 89.5% 89.0% 88.5% 88.5%	92.0% 92.0% 91.5% 91.0% 90.5% 90.5%	- - - - -	Measured at full load and steady-state temperature in 25°C ambient; (Efficiency will be about 2.0% lower if measured immediately after startup.)			

2/10

Rev. B

General Specifications (Continued)

Parameter	Min.	Тур.	Max.	Notes
Efficiency at 220 Vac input: I_O = 1050 mA I_O = 1400 mA I_O = 2100 mA I_O = 2800 mA I_O = 4900 mA I_O = 6200 mA	92.0% 92.0% 92.0% 91.0% 91.0% 91.0%	94.0% 94.0% 94.0% 93.0% 93.0% 93.0%	- - - -	Measured at full load and steady-state temperature in 25°C ambient; (Efficiency will be about 2.0% lower if measured immediately after startup.)
Efficiency at 277 Vac input: $I_O = 1050 \text{ mA}$ $I_O = 1400 \text{ mA}$ $I_O = 2100 \text{ mA}$ $I_O = 2800 \text{ mA}$ $I_O = 4900 \text{ mA}$ $I_O = 6200 \text{ mA}$	92.0% 92.0% 92.0% 92.0% 91.5% 91.5%	94.0% 94.0% 94.0% 94.0% 93.5% 93.5%	1 1 1 1 1	Measured at full load and steady-state temperature in 25°C ambient; (Efficiency will be about 2.0% lower if measured immediately after startup.)
Standby power	-	-	1.5 W	Measured at 230Vac/50Hz; Dimming off
MTBF	-	202,000 Hours	-	Measured at 220Vac input, 80%Load and 25°C ambient temperature (MIL-HDBK-217F)
Lifetime	-	103,000 Hours	-	Measured at 220Vac input, 80%Load and 60°C case temperature; See lifetime vs. Tc curve for the details
Operating Case Temperature for Safety Tc_s	-40°C	-	+90°C	
Operating Case Temperature for Warranty Tc_w	-40°C	-	+70°C	
Storage Temperature	-40°C	-	+85°C	Humidity: 5%RH to 100%RH
Dimensions Inches (L × W × H) Millimeters (L × W × H)		82 × 3.86 × 1. 224 × 98 × 44.		
Net Weight	-	1600 g	-	

Note: All specifications are typical at 25 °C unless stated otherwise.

Dimming Specifications

Min.	Тур.	Max.	Notes		
-20 V	-	20 V			
100 uA	140 uA	180 uA			
10%l ₀	-	100%l _O			
0 V	-	10 V			
0.2 V	0.4 V	0.6 V			
0.4 V	0.6 V	0.8 V			
-	0.2 V	-			
	-20 V 100 uA 10%l ₀ 0 V 0.2 V 0.4 V	-20 V - 100 uA 140 uA 10%I _O - 0 V - 0.2 V 0.4 V 0.4 V 0.6 V	-20 V - 20 V 100 uA 140 uA 180 uA 10%lo - 100%lo 0 V - 10 V 0.2 V 0.4 V 0.6 V 0.4 V 0.6 V		

Note: All specifications are typical at 25 °C unless stated otherwise.

3/10

Fax: 86-571-86601139


Rev. B

Safety & EMC Compliance

Safety Category	Standard
CE	EN 61347-1, EN61347-2-13
EMI Standards	Notes
EN 55015	Conducted emission Test & Radiated emission Test
EN 61000-3-2	Harmonic current emissions
EN 61000-3-3	Voltage fluctuations & flicker
EMS Standards	Notes
EN 61000-4-2	Electrostatic Discharge (ESD): 8 kV air discharge, 4 kV contact discharge
EN 61000-4-3	Radio-Frequency Electromagnetic Field Susceptibility Test-RS
EN 61000-4-4	Electrical Fast Transient / Burst-EFT
EN 61000-4-5	Surge Immunity Test: AC Power Line: line to line 4 kV, line to earth 6 kV*
EN 61000-4-6	Conducted Radio Frequency Disturbances Test-CS
EN 61000-4-8	Power Frequency Magnetic Field Test
EN 04000 4 44	Voltage Dips
EN 61000-4-11	Voltage Dips

^{*} **Note:** To perform electric strength (hi-pot) testing, the "GDT ground disconnect" (nut and metal lock sheet) on the driver end-cap should be removed temporarily to prevent the internal gas discharge tube from conducting (as allowed by IEC 60598-1 Clause 10.2). After testing is compete, these items must be reinstalled to restore line-to-earth surge protection and secure the end cap.

Lifetime vs. Case Temperature




4/10


Fax: 86-571-86601139


Rev. B







Efficiency vs. Load











5/10


Fax: 86-571-86601139

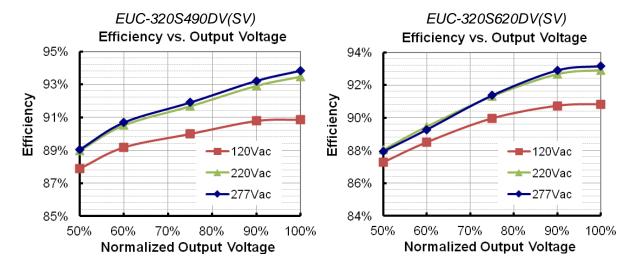

Power Factor

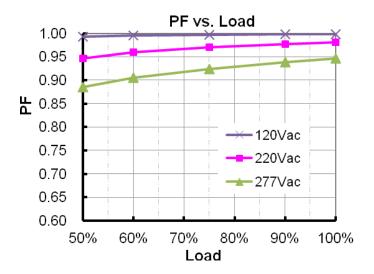

Total Harmonic Distortion

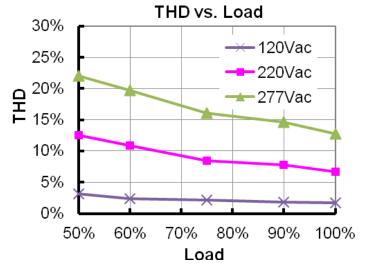

6/10

Fax: 86-571-86601139

Rev. B


Protection Functions

Parameter	Notes
Over Temperature Protection	Decreases output current, returning to normal after over temperature is removed.
Short Circuit Protection	Auto Recovery. No damage will occur when any output is short circuited. The output shall return to normal when the fault condition is removed.
Over Voltage Protection	Limits output voltage at no load and in case the normal voltage limit fails.


Dimming

0-10V Dimming

Recommended implementations of the dimming control are provided below.

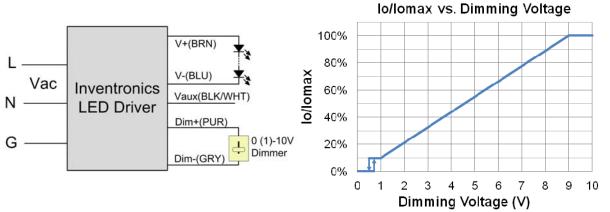


Implementation 1: DC Input

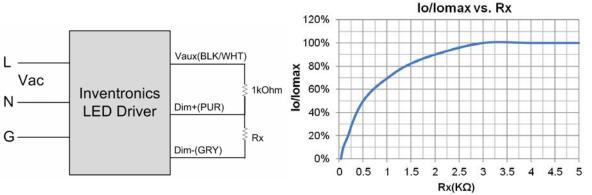

Implementation 2: External Resistor

Rev. B

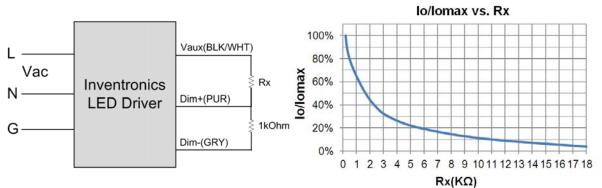


Implementation 3: External Resistor

Notes:

- 1. The dimmer can also be replaced by an active 0-10V voltage source signal or passive components like resistors and zener.
- 2. Do NOT connect Dim- to the output V- or V+, otherwise the driver will not work properly.
- 3. If 0-10V dimming is not used, Dim + can be either open or connected to Vaux.


Mechanical Outline

EUC-320SxxxDV

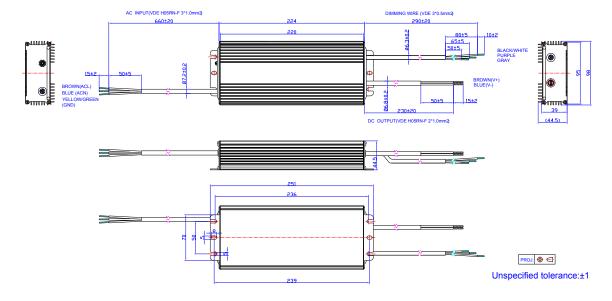

Rev. B

EUC-320SxxxSV

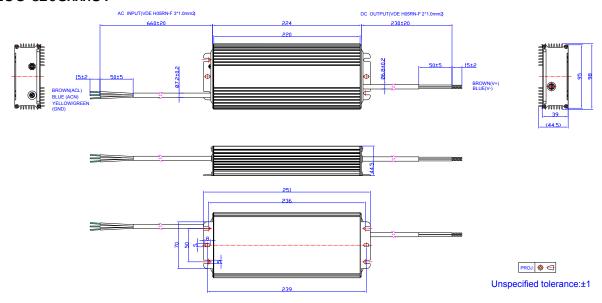

RoHS Compliance

Our products comply with the European Directive 2011/65/EC, calling for the elimination of lead and other hazardous substances from electronic products.



Rev. B

320W Constant Current Outdoor Driver

Revision History

Change	Day	Description of Change					
Date Rev.		Item	From	То			
2015-03-16	Α	Datasheets Release	/	/			
	В	Description	/	Update			
2015-06-01		Models	/	Update			
		Mechanical Outline	/	Update			