

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 04/27/05'	~	LJH 04/22/06'
B	ADD SCREW TYPE	DMJ 06/27/07'	~	LJC 06/27/07'
C	整理图画	YCH 05/21/08'	~	LJC 05/21/08'
F	ADD Pos TYPE	JLZ 03/29/16'	~	















NOTES:

- ELECTRICAL CHARACTERISTICS:
  - CONTACT RESISTANCE: 20mΩ Max. INITIAL.
  - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
  - INSULATION RESISTANCE: 1000MΩ Min.
- ENVIRONMENT CHARACTERISTICS:
 

TEMPERATURE RANGE: -40°C~+105°C.
- PART NUMBER: DS1034
- PRODUCT NUMBER CODE:
 

DS1034- X X X X X X X

  - SCREW DIM. A
    - S: Standard(W/O nut)
    - 1: 5.00 2: 3.00 3: 5.20
    - 4: 4.80 5: 5.80 6: 4.00
    - 7: 4.80mm(Inside thread M2.6\*0.45p, outside thread unc#4-40)
    - 8: 4.80mm(Inside thread M3.0\*0.5p, outside thread unc#4-40)
  - SCREW TYPE
    - S: Standard(W/O nut)
    - 1: CC TYPE 2: CS TYPE
    - 3: BR TYPE 4: BRJ TYPE DIM. B:6.00 C: 3~4mm
    - 5: BRJ TYPE DIM. B:6.00 C: 5~6mm
    - 6: BRJ TYPE DIM. B:6.00 C: 3~4mm (Inside thread M2.6\*0.45P,outside thread unc#4-40)
    - 7: BRJ TYPE DIM. B:6.00 C: 3~4mm (Inside thread M3.0\*0.50P,outside thread unc#4-40)
  - CONTACT PLATING
    - Si: FULL GOLD FLASH
    - 0: SELECTIVE GOLD FLASH
  - SHELL PLATING
    - T: FORNT & BACK SHELL TIN
    - N: FORNT SHELL NICKEL,BACK SHELL TIN
  - HOUSING COLOR
    - B: BLACK W: WHITE
    - U: BLUE
  - CONNECTOR TYPE
    - M: MALE F: FEMALE
  - No.OF CONTACTS
    - 09: 9pos. 15: 15pos. 25: 25pos.
    - 37: 37pos. 50: 50pos.

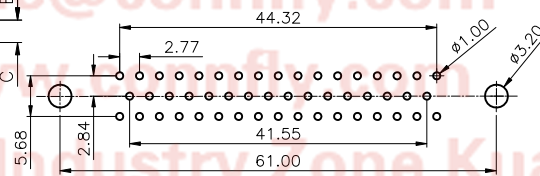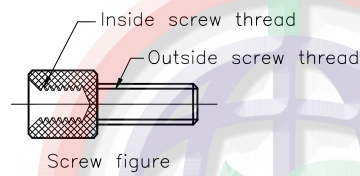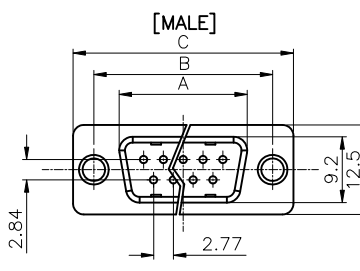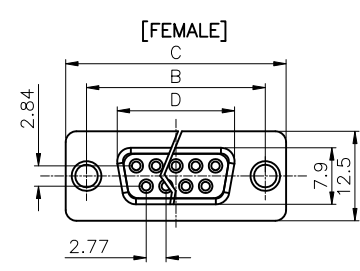

RECOMMEND PCB LAYOUT(50P)  
(TOLERANCE ±0.05)


Dimension	Position	A±0.2	B±0.2	C±0.3	D
	9	17.90	24.99	30.80	16.33
	15	26.50	33.32	39.14	24.66
	25	40.00	47.04	53.04	38.38
	37	56.50	63.50	69.32	54.84

RECOMMEND PCB LAYOUT  
(TOLERANCE ±0.05)

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

PROJECTION	TITLE	D-SUB DIP STRAIGHT TYPE	
UNITS	mm		
SHEET SIZE	A4	SERIES	DS1034 SERIES

DRAWING TYPE	CUSTOMER		
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	C-DS1034-XXXXXXX-F		

 晨翔电子有限公司  
**CONNFLY CONNFLY ELECTRONIC CO. LTD**