


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	DGQ 06/14/11'		LJC 06/14/11'
B	PACKING TYPE CHANGE $\Delta$	JLZ 01/30/15'		

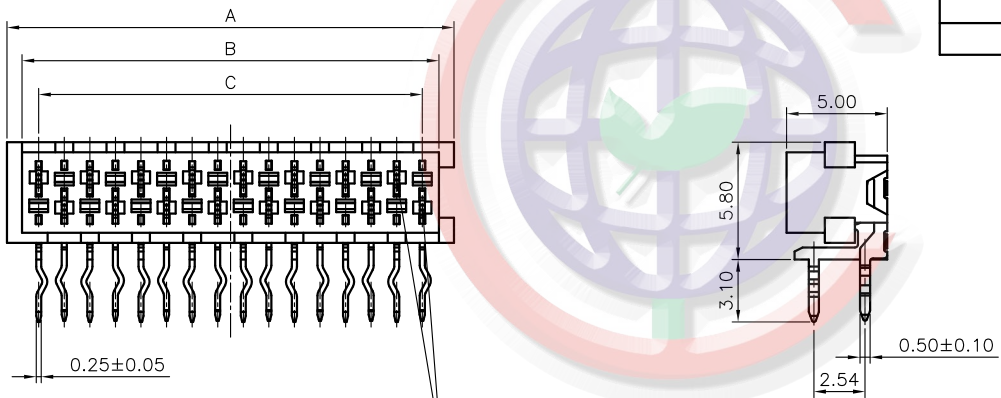

NOTES:

- MATERIAL
  - INSULATOR:THERMOPLASTIC(UL 94V-0).
  - CONTACT: 0.25t COPPER ALLOY.
- SPECIFICATION
  - TEMPERATURE RANGE:-40°C~+105°C.
  - CONTACT RESISTANCE:30mΩ max.
  - INSULATION RESISTANCE:1000MΩ min.
  - DIELECTRIC WITHSTANDING VOLTAGE:AC 500V PER MINUTE.

3. PRODUCT NUMBER CODE:

DS1015-05 - X X X X




- PACKING TYPE  
B: TUBE  $\Delta$
- CONTACT PLATING  
6: FULL MATT TIN
- HOUSING COLOR  
R: RED
- No. OF CONTACTS  
04 06 08 10 12 14  
16 18 20 22 24

POSITIONS	DIM A	DIM B	DIM C
4	6.96	5.46	3.81
6	9.50	8.00	6.35
8	12.04	10.54	8.89
10	14.58	13.08	11.43
12	17.12	15.62	13.97
14	19.66	18.16	16.51
16	22.20	20.70	19.05
18	24.74	23.24	21.59
20	27.28	25.78	24.13
22	29.82	28.32	26.67
24	32.36	30.86	29.21

CONNFLY

Tel: 86-574-63503797  
Fax: 86-574-63510817  
E-mail: sale@connfly.com  
http://www.connfly.com  
Add: East Industry Zone Hualing Yan  
Town Cixi Ningbo China  
P.C: 315333

CONTACT ROW-DISTANCE

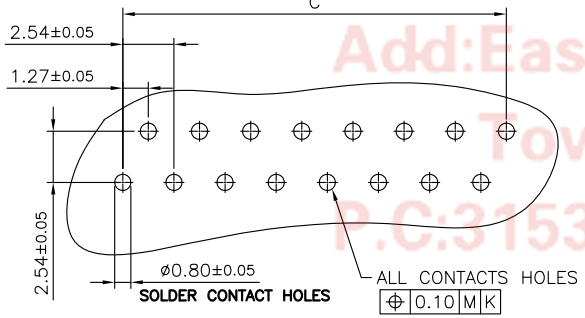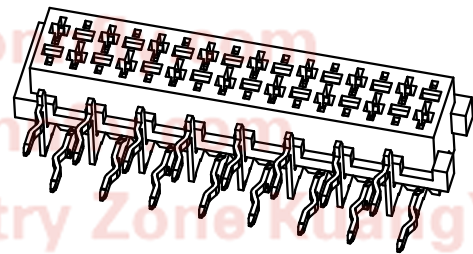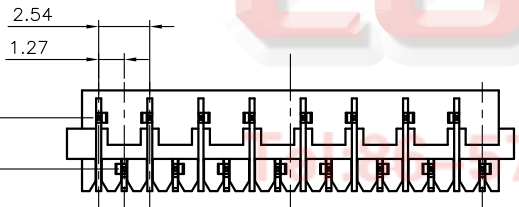

RECOMMEND PCB LAYOUT  
(COMPONENT SIDE OF BOARD SHOWN)

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	MICRO MATCH FEMALE RIGHT ANGLE THROUGH HOLE TYPE	
X.	±0.60	X.	±5°	UNITS	mm	SERIES	DS1015-05 SERIES	
.X	±0.38	.X	±3°	SHEET SIZE	A4			
.XX	±0.25	.XX	±2°			晨翔电子有限公司 <b>CONNFLY CONNFLY ELECTRONIC CO. LTD</b>		
DRAWING TYPE		CUSTOMER						
SCALE	1:1	SHEET	1 OF 1					
DRAWING NO.		C-DS1015-05-XXXX-B						