ø76mm

50mm

26mm

M4 x 13mm lg studs. Nuts and washers provided

3 Leads x 500mm lg

ø45mm
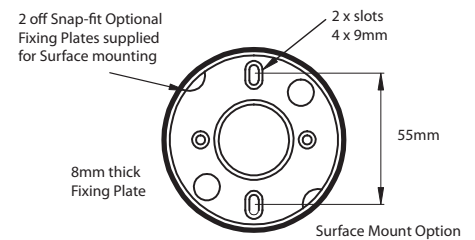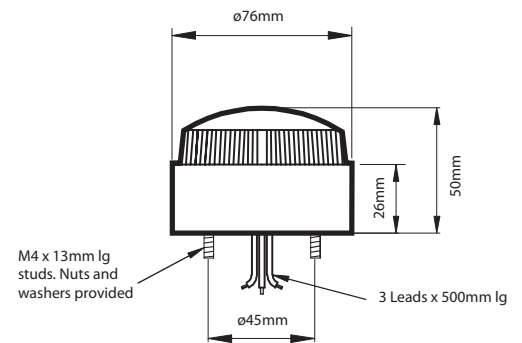
Industrial LED Dual Function >
LED80 Series

Product overview

The LED80 incorporates 12 ultra bright Surface Mount LEDs offering an economic solution for a wide range of general signalling solutions.

Ideally suited for local indication the beacon is controlled by either two wires (flashing mode) or three (static mode).

The beacons are supplied fully assembled and ready for immediate installation.

The unit offers two mounting options, either Stud Mount or Surface Mounting using the two piece fixing plate supplied. One plate is fixed to the appropriate surface the other to the beacon, the two plates then 'Snap Fit' together.

2 off Snap-fit Optional Fixing Plates supplied for Surface mounting

2 x slots 4 x 9mm

55mm

8mm thick Fixing Plate

Surface Mount Option

LED80 Series > Ordering Information

Code No:	Voltage:	Light Source:	Current:	
LED80-02	10-100v Dc ---	LED Array	90 mA	Flashing
			200 mA	Static
				at 24v Dc ---
LED80-04	115/230v Ac ~	LED Array	20 mA	

ADD THE FOLLOWING LENS CODES TO THE PRODUCT WHEN ORDERING   **01** **02** **03** **04**

Features

- LED long life
- Extra bright
- Continuously rated
- Wide operating voltage
- 120° prime light output from vertical axis
- Dustproof & submersible in water

Material

UV Stable Polycarbonate
Lens and Body

Kg 0.14	**°C** -20+55	**IP** 67	**FPM** 60	**INDUSTRIAL**	**FIRE**

APPROVALS and CONFORMITIES

RoHS   CE

MARINE