

## Connector - PV-CM-S 2,5-6 (-) - 1774687


Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Photovoltaic connector, nominal current: 35 A, nom. voltage: 1100 V, connection method: Spring-cage, color: black. can only be released using a tool

RoHS

### Key Commercial Data

Packing unit	50 STK
Minimum order quantity	50 STK
GTIN	 4 046356 480192
GTIN	4046356480192
Weight per Piece (excluding packing)	0.013 kg
Custom tariff number	85359000
Country of origin	Germany
Note	Made to Order (non-returnable)

### Technical data

#### Dimensions

External cable diameter	5.5 mm ... 8 mm
-------------------------	-----------------

#### Ambient conditions

Degree of protection (when plugged in)	IP66 / IP68 (2 m / 24 h)
Ambient temperature (operation)	-40 °C ... 85 °C
Ambient temperature (assembly)	-25 °C ... 50 °C

#### General

Design	Pin
Tightening torque nut	2 Nm ±0.1 Nm
Insertion force	45 N ±10 N
Disconnect force	250 N ±50 N
Pull-out force of cable >= disconnect force	> 330 N
Rated voltage	1100 V

# Connector - PV-CM-S 2,5-6 (-) - 1774687

## Technical data

### General

Rated current (2.5 mm <sup>2</sup> )	27 A
Rated current (4.0 mm <sup>2</sup> )	35 A
Rated current (6.0 mm <sup>2</sup> )	40 A
Nominal cross section	6 mm <sup>2</sup>
Protection class	II

### Material

Color	black
Insulating material	mPPE
Contact material	Cu
Contact surface material	Ag
Flammability rating according to UL 94	V0

### Connection data

Connection method	Spring-cage
Connection capacity	2.5 mm <sup>2</sup> ... 6 mm <sup>2</sup>
Contact resistance with connected conductor	0.45 mΩ
Stripping length	15 mm
Cable type	H1Z2Z2-K cables

### Standards and Regulations


Flammability rating according to UL 94	V0
--	----

### Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

## Drawings

Dimensional drawing

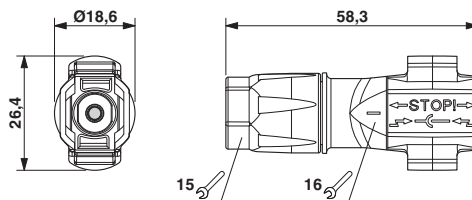

## Classifications

### eCl@ss

eCl@ss 4.0	272607xx
eCl@ss 4.1	27260701
eCl@ss 5.0	27260701

# Connector - PV-CM-S 2,5-6 (-) - 1774687

## Classifications

### eCl@ss

eCl@ss 5.1	27143423
eCl@ss 6.0	27260704
eCl@ss 7.0	27440402
eCl@ss 8.0	27440102
eCl@ss 9.0	27440103

### ETIM

ETIM 3.0	EC001121
ETIM 4.0	EC001753
ETIM 5.0	EC002635
ETIM 6.0	EC002061

### UNSPSC

UNSPSC 6.01	30211810
UNSPSC 7.0901	39121409
UNSPSC 11	39121409
UNSPSC 12.01	39121409
UNSPSC 13.2	39121413

## Approvals


### Approvals

Approvals

VDE Zeichengenehmigung / EAC

Ex Approvals

### Approval details

VDE Zeichengenehmigung		<a href="http://www.vde.com/en/Institute/OnlineService/VDE-approved-products/Pages/Online-Search.aspx">http://www.vde.com/en/Institute/OnlineService/VDE-approved-products/Pages/Online-Search.aspx</a>	40031807
mm <sup>2</sup> /AWG/kcmil	2.5		
Nominal current I <sub>N</sub>	27 A		
Nominal voltage U <sub>N</sub>	1100 V		

## Connector - PV-CM-S 2,5-6 (-) - 1774687

### Approvals

EAC



B.01742

### Accessories

#### Accessories

##### Protective cap

Protective cap - PV-C PROTECTION CAP - 1785430

Protective cap for SUNCLIX photovoltaic connector; transport protection for the mating face.



##### Screwdriver tools

Screwdriver - SZF 1-0,6X3,5 - 1204517



Actuation tool, for ST terminal blocks, also suitable for use as a bladed screwdriver, size: 0.6 x 3.5 x 100 mm, 2-component grip, with non-slip grip

##### Sealing plugs

Filler plugs - PV-C PLUG - 1775631



Protective cap for SUNCLIX photovoltaic connector, for IP67 protection in the cable gland.

##### Stripping tool

Stripping pliers - QUICK WIREFOX 6 SC - 1207637



Stripping tool for short-circuit proof conductors, stripping range: 1.5 up to 6 mm<sup>2</sup>, wire cutting up to 6 mm<sup>2</sup> cable stopper up to 18 mm<sup>2</sup>

## Connector - PV-CM-S 2,5-6 (-) - 1774687

### Accessories

Stripping tool - WIREFOX-D SR 6-1 - 1212511



Stripping tool, for standard 2.5, 4, and 6 mm<sup>2</sup> solar cables, with 15 mm length stop, for SUNCLIX field connectors