REV.	ECN NO.	DATE	SIGN	DESCRIPTION

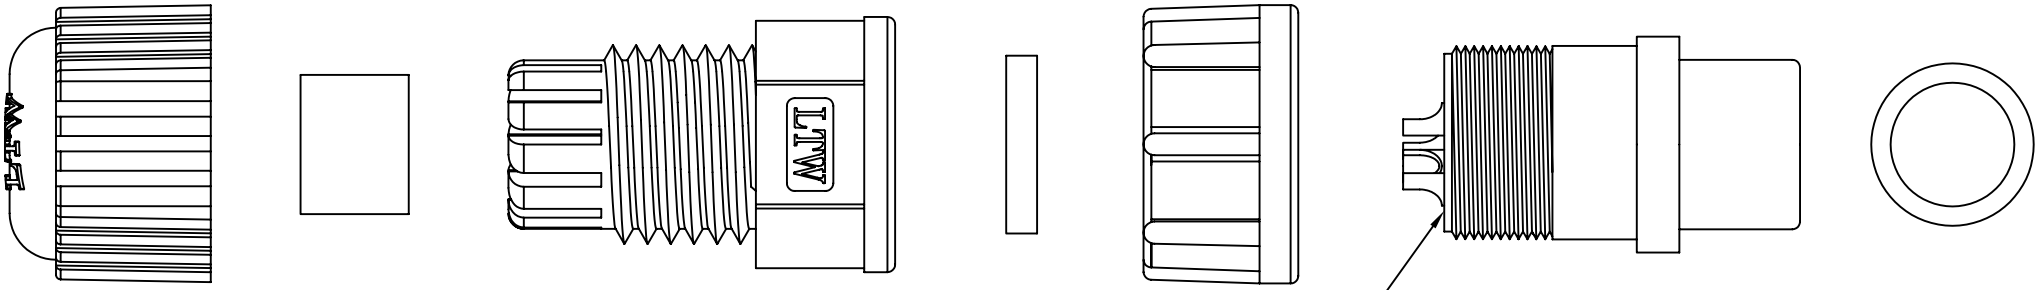

LTW
ENG. DEPT.
CONFIDENTIAL
2006.04.21
ISSUED

With Liquid Glue
點 防 水 膠

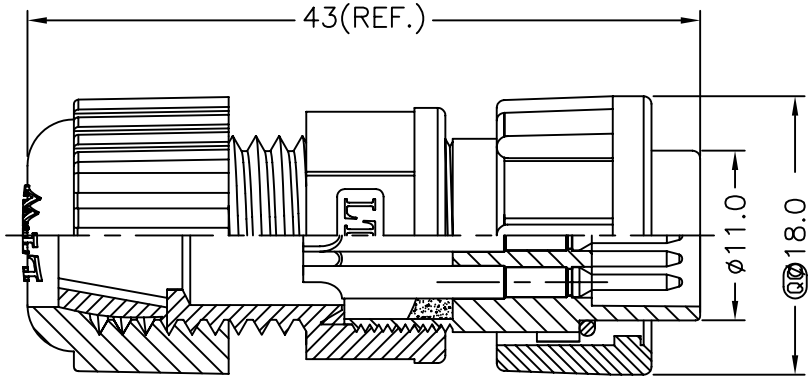



Pin Assignments
Front View前視圖

Note:

* Waterproof Rate : IP67
* ⓆⒸ Important Dimension To Check.
  (ⓆⒸ 為重點檢驗尺寸)
* Seals for Cable OD:ø4.5mm~ø6.5mm
  (防水墊圈線徑 :4.5mm~ø6.5mm)
* One Set Unassembled in One PE Bag
  (每一組未組裝, 放置於一個 PE袋, 並封口)
* Housing:Black,Nylon+GF
* Male Pin:Copper Alloy,Gold Plated
* O-Ring:Black,EPDM
* Lock Nut:Black,Nylon+GF
* Gasket:Black,EPDM
* Seals:Black,EPDM
* Clamp Ring:Black,Nylon
* Sealing Nut:Black,Nylon
* Liquid Glue:Clear

UNIT:mm	TITLE: Standard Assy Lock 6P F CONN M PIN	LTW 亮泰企業股份有限公司	ITEM NO: LTWBD-06BFMA-LL7001 / DRAWN BY: Hong XueJing / DATE: 2006/04/08
TOLERANCE .X ±0.25, .XX ±0.1, .XXX ±0.05, ANGLES ±1°	SCALE: Free / SHEET: 1 OF 1		DWG NO: LTWBD-06BFMA-LL7001 / CHECKED BY: Tina / DATE: 2006/04/10
	REV: A / SIZE: A4 / ⓆⒸ :Inspection Item		CUSTOMER / APPROVED BY: Rita / DATE: 2006/04/17

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN LTW PERSONNEL WITHOUT AUTHORIZATION FROM LTW CORP.