


RXM4AB2BD

miniature plug-in relay - Zelio RXM - 4 C/O - 24 V DC - 6 A - with LED

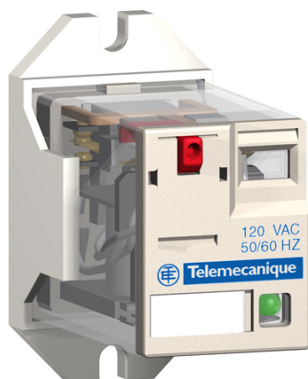

Main

Range of product	Zelio Relay
Series name	Miniature
Product or component type	Plug-in relay
Device short name	RXM
Status LED	With
Control type	Pushbutton
Control circuit voltage	24 V DC
Contacts type and composition	4 C/O
Contacts operation	Standard
Coil interference suppression	Without
[Ithe] conventional enclosed thermal current	6 A at $\leq 55^\circ\text{C}$
Contacts material	Silver alloy (Ag/Ni)
Resistive rated load	6 A at 250 V AC 6 A at 28 V DC
Utilisation coefficient	20 %
Rated operational voltage limits	19.2...26.4 V DC
Sale per indivisible quantity	10

Complementary

[Ui] rated insulation voltage	250 V conforming to IEC 300 V conforming to UL 300 V conforming to CSA
[Uimp] rated impulse withstand voltage	4 kV conforming to IEC 61000-4-5
[Ie] rated operational current	3 A (AC-1/DC-1) NC conforming to IEC 6 A (AC-1/DC-1) NO conforming to IEC 8 A (AC-1/DC-1) conforming to UL
Minimum switching current	10 mA
Maximum switching voltage	250 V AC/DC
Minimum switching voltage	17 V
Maximum switching capacity	168 W , DC circuit 1500 VA , AC circuit
Minimum switching capacity	170 mW
Operating rate	≤ 20 cyc/mn (under load) ≤ 300 cyc/mn (no-load)
Mechanical durability	10000000 cycles
Electrical durability	100000 cycles for resistive load
Average consumption in W	0.9 W , DC circuit
Average consumption in VA	1.2 , AC circuit
Drop-out voltage threshold	≥ 0.15 Uc (AC control) ≥ 0.1 Uc (DC control)
Operating time	20 ms between coil de-energisation and making of the Off-delay contact (AC/DC) 20 ms between coil energisation and making of the On-delay contact (AC/DC)
Average resistance	650 Ohm , DC circuit at $20^\circ\text{C} \pm 10\%$
Protection category	RT I
Operating position	Any position
Product weight	0.037 kg

Environment

Dielectric strength	1500 V AC (between contacts) 1550 V AC (between coil and contact) 1550 V AC (between poles)
Product certifications	CSA UL
Standards	CSA C22-2 No 14 EN/IEC 61810-1 (iss. 2) UL 508
Ambient air temperature for storage	-40...85 °C
Ambient air temperature for operation	-40...55 °C
Vibration resistance	3 gn (f = 10...150 Hz), amplitude +/- 1 mm (on opening) conforming to EN/IEC 60068-2-27 5 gn (f = 10...150 Hz), amplitude +/- 1 mm (on closing) conforming to EN/IEC 60068-2-27
IP degree of protection	IP40 conforming to EN/IEC 60529
Shock resistance	15 gn on closing conforming to EN/IEC 60068-2-27 15 gn on opening conforming to EN/IEC 60068-2-27
RoHS EUR conformity date	0801
RoHS EUR status	Compliant