



EMPTY ENCLOSURE

GEOS-L 4050-22-to



GEOS-L 4050-22-to


Empty enclosure

400 x 500 x 226 mm

Article number: 70174501

Empty enclosure - Industrial Quality -, suitable for installation in harsh environments and unprotected exterior areas, Base: glass fibre reinforced polycarbonate, Grey, similar to RAL 7035, Cover: Polycarbonate

with transparent cover

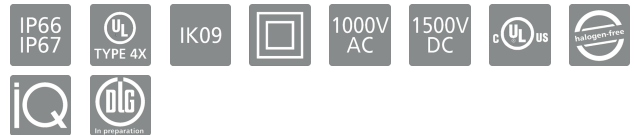

Technical data

Measures

Width:	400 mm
Length:	500 mm
Height:	226 mm
Inner height:	204 mm
Inner width:	371 mm
Inner length:	471 mm

Material:

material:	Polycarbonate
Box:	polycarbonate, glass fiber-reinforced
Cover:	Polycarbonate, transparent
Sealing:	thermoplastic elastomer
Cover screw:	Polyamide 6, fiber-

Accessory

- SRS 60-90 - Screw clamp set
- GEOS-L EP-4050 - Mounting plate
- GEOS MH-22 - Mounting holder
- GEOS-L TW 40-22 - Partition wall
- GEOS-L TW 50-22 - Partition wall
- GEOS NS35-350 - Standard rail
- GEOS NS35-450 - Standard rail
- GEOS ABL-10 - External fixing lug
- GEOS ABL-40 - External fixing lug
- GEOS MPI-4050 - Mounting plate
- GEOS MPS-4050 - Mounting plate
- BEL Air M40 - Ventilation element set
- LFR M40 - Hole cutter
- GEOS MSS-40 - Mast clamp set
- GEOS MSS-50 - Mast clamp set
- SRS 90-150 - Screw clamp set



EMPTY ENCLOSURE

GEOS-L 4050-22-to

glass reinforced

Other attributes

Combustion behaviour acc. to UL 94:	V-2 acc. UL 94
Combustion behaviour to UL 50 / UL 746C:	5VA nach UL 50 / UL 746C
Combustion behaviour acc. to VDE:	960°C acc. VDE 0471/ EN 60695
Ingress protection:	IP66/IP67 acc. EN 60529 / DIN VDE 0470-1
Impact resistance:	IK09 acc. DIN EN 50102 / VDE 470 segment 100
Color:	Grey
Rated insulation voltage AC:	1000 V
Rated insulation voltage DC:	1500 V

Environmental attributes

Ambient temperature (min.):	-35 °C
Ambient temperature (max.):	80 °C
Ambient temperature (24 h):	60 °C
Max. rel. humidity at 25° C (short term):	95%
Max. rel. humidity at 40° C:	50%