

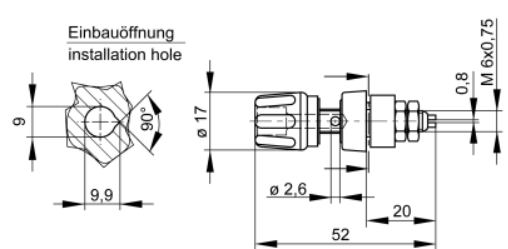


datasheet for PKNI 10 B  
 article number: 930136100



<b>product description:</b>	order number: 930 136-100
<b>description:</b>	Pole terminal with claw edge, captive insulated head and insulated ring. 6 mm diameter nickel-plated brass threaded bolt with 2.6 mm diameter transverse hole. For insulated non-rotating installation in equipment chassis and switch panels up to 3.5 mm wall
<b>typ:</b>	PKNI 10 B schwarz / black
<b>system:</b>	4mm system
<b>order number:</b>	930 136-100
<b>color</b>	
<b>other color versions:</b>	
<b>technical data</b>	
<b>measurement category acc. to IEC 61010:</b>	CAT I
<b>type of contact:</b>	4 mm socket (unsprung), 2.6 mm cross hole
<b>type of termination:</b>	M6 thread, solder
<b>rated voltage:</b>	30 VAC / 60 VDC
<b>rated current:</b> <a href="#">Please consider derating curve!</a>	63 A
<b>contact resistance:</b>	2 mOhm
<b>mounting:</b>	screw
<b>material</b>	
<b>contact material:</b>	brass
<b>contact surface material:</b>	nickel
<b>environmental conditions:</b>	
<b>temperature range:</b>	-25 °C to +100 °C
<b>drawing</b>	
 <p>The drawing shows two views of the terminal. The left view is a top-down perspective of the installation hole, showing a square hole with a width of 9.9 mm and a depth of 9 mm. The hole is oriented at a 90-degree angle. The right view is a side profile of the terminal, showing a total length of 52 mm. Key dimensions include a 17 mm diameter for the main body, a 2.6 mm diameter for the transverse hole, a 20 mm distance from the end of the terminal to the transverse hole, and an M6x0.75 thread for the mounting screw with a 0.8 mm diameter for the screw head.</p>	