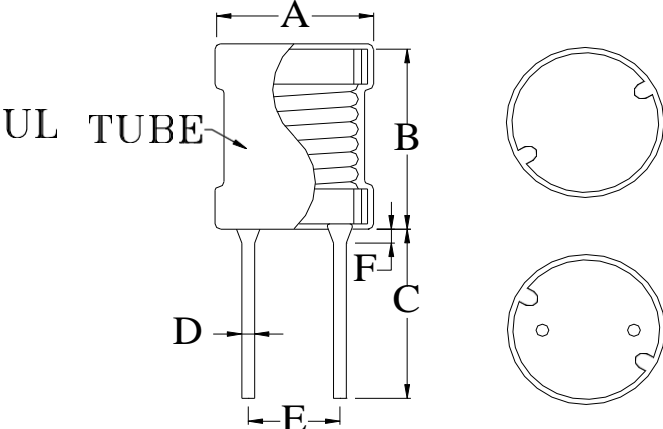


SPECIFICATION FOR APPROVAL

COMMODITY	PK CHOKE		SPEC NO.	SP-060824009
ITEM	COIL0406-0.01	Green	A	QRRD-01-02

(1) DIMENSION: (UNIT: mm)		DIM.	TOL.
 <p>UL TUBE</p>	A	5.5	MAX.
	B	7.5	MAX.
	C	16.0	±3.0
	D	0.65	±0.1
	E	2.0	±0.5
	F	3.0	MAX.
	G		
	H		
	I		
	J		

(2) ELECTRICAL CHARACTERISTIC			TEST INSTRUMENTS.
INDUCTANCE	10± 10%	μH	<input checked="" type="checkbox"/> AGILENT 4294A Precision Impedance Analyzer. <input type="checkbox"/> AGILENT 4285A Precision L.C.R. Meter. <input type="checkbox"/> HP-4286A RF L.C.R. Meter.
TEST FREQUENCY	1	kHz	<input type="checkbox"/> ZENITECH 3302 Automatic Components Analyzer. <input type="checkbox"/> ZENITECH 101 L.C.R. Meter.
TEST VOLT	0.25	V	<input type="checkbox"/> WAYNE KERR 6420 Precision Impedance Analyzer. <input checked="" type="checkbox"/> ZENITECH 1320 BIAS CURRENT.
RDC	100.48 (max)	mΩ	<input checked="" type="checkbox"/> ZENITECH 502AC Resistance Meter. <input type="checkbox"/> ADEX AX-1155B DC Low Ohm Meter.
Isat	1.7 (max)	A	
Irms	1.6 (max)	A	

REMARK :

1. Inductance drop = 10% typ at Isat.
2. ΔT = 40°C rise typ at Irms.

SPECIFICATION FOR APPROVAL

COMMODITY	PK CHOKE		SPEC NO.	SP-060824009
ITEM	COIL0406-0.01	Green	A	QRRD-01-02
(3) Material List				
NO	ITEM	MATERIAL	NOTE	
1	CORE	C5N DR2W 4*6(W) (B2 F3 P2) or equivalent		
2	WIRE	2UEW 130°C CLASS 0.28/22Ts		
3	SOLDER	Sn 99.3 % / Cu 0.7%		
4	TUBE	UL 4*7.5		