


ALS40, Aluminum Electrolytic, 105C, 0.01 F, 20%, 100 V, -40/+105C

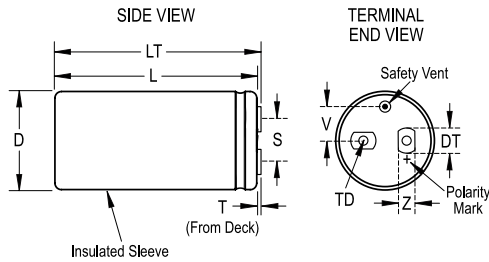

Dimensions	
D	51mm +/-1mm
L	105mm +/-2mm
T	5.5mm +/-0.5mm
S	22.2mm +/-0.5mm
DT	13mm +/-0.5mm
LT	110.5mm +/-1mm
TD	10mm MIN
V	13.7mm NOM
Z	10mm NOM

Packaging Specifications	
Weight:	300 g
Sleeving:	Yes
Packaging:	Bulk, Box

General Information	
Supplier:	KEMET
Series:	ALS40
Dielectric:	Aluminum Electrolytic
Description:	Screw Terminal, Aluminum Electrolytic
RoHS:	Yes
Notes:	Dimensions D And L Include Sleeving. MS (MxH) = M12x16

Specifications	
Capacitance:	0.01 F
Capacitance Tolerance:	20%
Voltage DC:	100 VDC, 115 VDC (Surge)
Temperature Range:	-40/+105C
Rated Temperature:	105C
Life:	7000 Hrs (Rated Voltage And Ripple Current At 105C), 11000 Hrs (Rated Voltage At 105C)
Resistance:	21 mOhms (100Hz 20C), 18 mOhms (10kHz 20C)
Current:	10.9 Amps (100Hz 105C), 11.5 Amps (10kHz 105C)
Leakage Current:	3000 uA (5min 20C)