


Film, Metallized Polyester Stacked, Commercial Grade, F161, 0.12 uF, 10%, 630 V, 250 V, 85C, 6560, 7mm

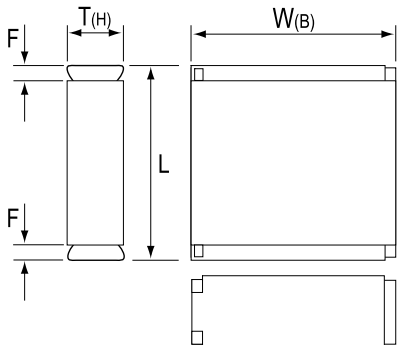

Note: '()' correspond to the letters used in the product bulletin

Dimensions	
Chip Size	6560
L	16.5mm +/-0.2mm
W	15mm +/-0.2mm
T	7mm +/-0.2mm
F	0.5mm NOM

Packaging Specifications	
Packaging:	T&R
Packaging Quantity:	500

General Information	
Dielectric:	Metallized Polyester Stacked
Style:	SMD Chip
Series:	F161
RoHS:	Yes
Approvals:	AEC-Q200
AEC-Q200:	Yes
Miscellaneous:	Add

Specifications	
Capacitance:	0.12 uF
Capacitance Tolerance:	10%
Voltage DC:	630 VDC
Voltage AC:	250 V
Temperature Range:	-55/+125C
Rated Temperature:	85C
Dissipation Factor:	0.8% 1kHz, 1.2% 10kHz, 3% 100kHz
Insulation Resistance:	1 GOhms
Max dVdt:	250 V

Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute - and we specifically disclaim - any warranty concerning suitability for a specific customer application or use. This Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by us with reference to the use of our products is given gratis, and we assume no obligation or liability for the advice given or results obtained.